

## Limit Alarms (rotary switch adj.) AL-UNIT


### POTENTIOMETER ALARM

#### Functions & Features

- Providing SPDT relay outputs at preset potentiometer or slidewire positions
- Dual (Hi/Lo) trip
- Constant voltage excitation allows use with pots with total resistances from 100  $\Omega$  - 10 k $\Omega$  without affecting accuracy
- Energized or de-energized coil at a tripped condition selectable
- Rotary switch setpoint adjustments
- Enclosed relays
- Relays can be powered 110 V DC
- High-density mounting

#### Typical Applications

- Annunciator
- Various alarm applications

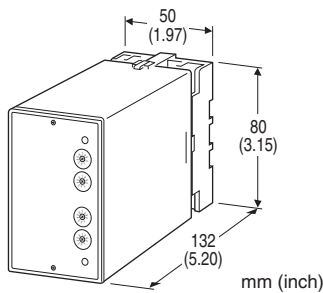

### MODEL: ALM-[1][2]-[3]

#### ORDERING INFORMATION

- Code number: ALM-[1][2]-[3]
- Specify a code from below for each [1] through [3].  
(e.g. ALM-11-B)
- Input zero/span adjustments (e.g. 200 - 800  $\Omega$  / 1 k $\Omega$ )  
Specify when you need scaled potentiometer input.

#### INPUT POTENTIOMETER

Total resistance 100  $\Omega$  - 10 k $\Omega$

#### [1] SETPOINT 1 OUTPUT

- 1: Hi (coil energized at alarm)
- 2: Hi (coil de-energized at alarm)
- 3: Lo (coil energized at alarm)
- 4: Lo (coil de-energized at alarm)

#### [2] SETPOINT 2 OUTPUT

- 1: Hi (coil energized at alarm)
- 2: Hi (coil de-energized at alarm)
- 3: Lo (coil energized at alarm)
- 4: Lo (coil de-energized at alarm)

#### [3] POWER INPUT

##### AC Power

- B: 100 V AC
- C: 110 V AC
- D: 115 V AC
- F: 120 V AC
- G: 200 V AC
- H: 220 V AC
- J: 240 V AC

##### DC Power

- S: 12 V DC
- R: 24 V DC
- V: 48 V DC
- P: 110 V DC

#### GENERAL SPECIFICATIONS

**Construction:** Plug-in

**Connection:** M3.5 screw terminals

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output 1 to output 2 to power

**Setpoint adjustments:** 10-position rotary switches (front); 0 - 99 % independently; 1 % increments

**Hysteresis (deadband):** 0.7 - 2.5 %

**Front LEDs:** Red lights turn on when the coils are energized.

**Power ON timer:** Relays de-energized for approx. 2 seconds after power is turned on.

#### INPUT SPECIFICATIONS

**Minimum span:** 50 % of total resistance

**Excitation:** 0.5 V DC

#### OUTPUT SPECIFICATIONS

■ **Relay Contact:** 100 V AC @ 1 A ( $\cos \phi = 1$ )

120 V AC @ 1 A ( $\cos \phi = 1$ )

240 V AC @ 0.5 A ( $\cos \phi = 1$ )

30 V DC @ 1 A (resistive load)

**Maximum switching voltage:** 380 V AC or 125 V DC


**Maximum switching power:** 120 VA or 30 W

**Minimum load:** 5 V DC @ 10 mA

**Mechanical life:**  $5 \times 10^7$  cycles

For maximum relay life with inductive loads, external protection is recommended.

**Alarm Trip Operation** Terminal No. in parentheses

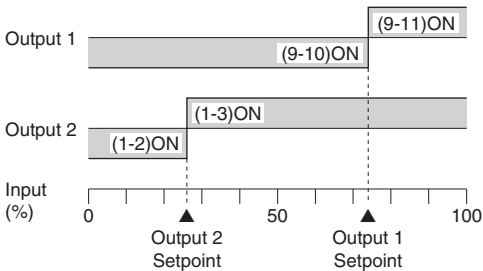

**Trip Operation in Power Failure**

- **Output Code: 1 & 4:** Terminals 1 – 2, 9 – 10 turn ON
- **Output Code: 2 & 3:** Terminals 1 – 3, 9 – 11 turn ON

**INSTALLATION**

**Power input**

- **AC:** Operational voltage range: rating  $\pm 10\%$ , 50/60  $\pm 2$  Hz, approx. 2 VA
- **DC:** Operational voltage range: rating  $\pm 10\%$ , or 85 – 150 V for 110 V rating (ripple 10 % p-p max.)  
Approx. 2 W (80 mA at 24 V)

**Operating temperature:** -5 to +60°C (23 to 140°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)


**Mounting:** Surface or DIN rail

**Weight:** 370 g (0.82 lbs)


**PERFORMANCE in percentage of span**

- Setpoint accuracy:**  $\pm 0.5\%$
- Trip point repeatability:**  $\pm 0.05\%$
- Temp. coefficient:**  $\pm 0.015\%/^{\circ}\text{C}$  ( $\pm 0.008\%/^{\circ}\text{F}$ )
- Response time:** Approx. 0.5 sec. (0 – 100 % at 90 % setpoint)
- Line voltage effect:**  $\pm 0.1\%$  over voltage range
- Insulation resistance:**  $\geq 100\text{ M}\Omega$  with 500 V DC
- Dielectric strength:** 2000 V AC @1 minute (input to output 1 to output 2 to power to ground)

**EXTERNAL VIEW**

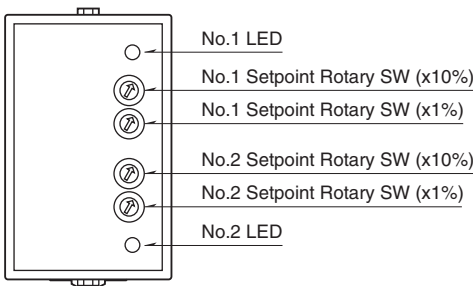


**EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)**

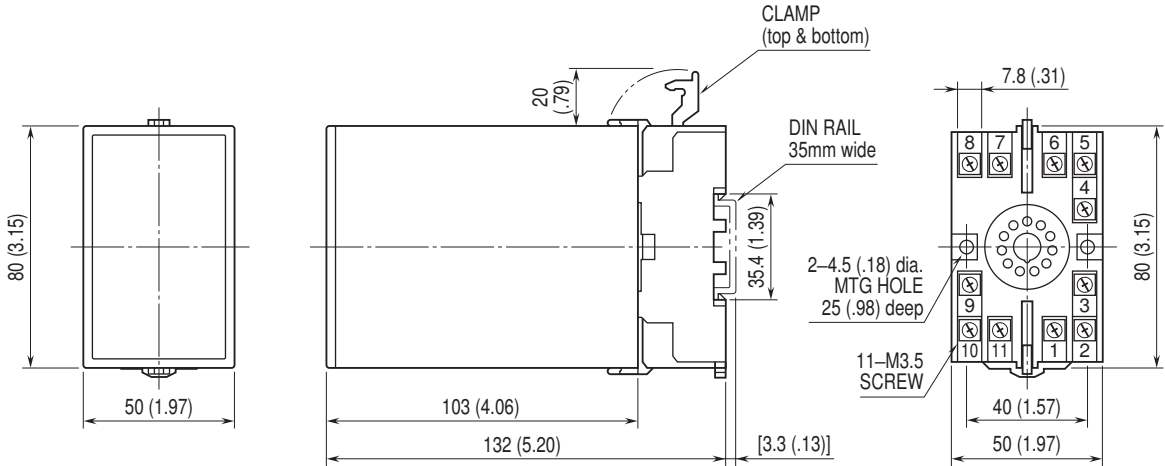


• When mounting, no extra space is needed between units.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

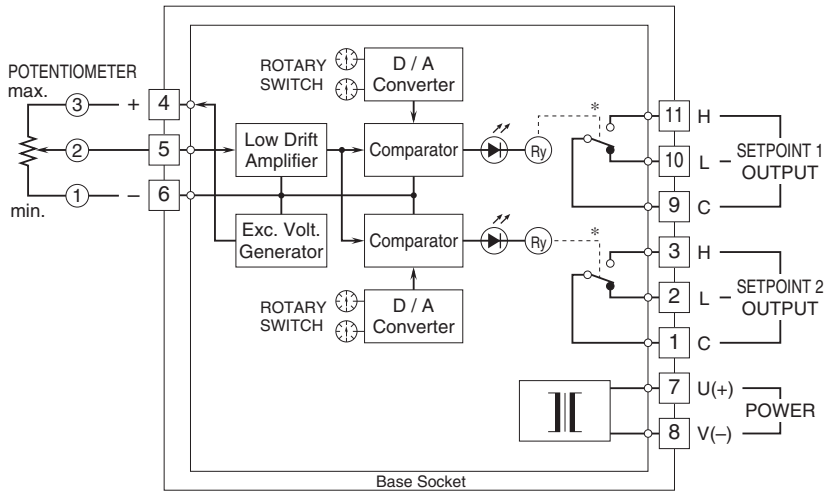

\*Relay status for output codes "1" & "4", at power OFF.

**Relay Protection**

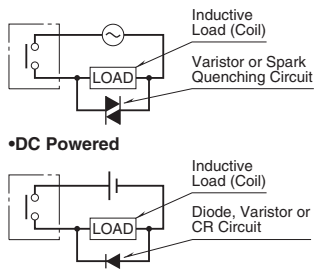

Specifications are subject to change without notice.

