


Remote I/O R7 Series

MULTI POWER MODULE

(Clamp-on current sensor CLSE, LonWorks)

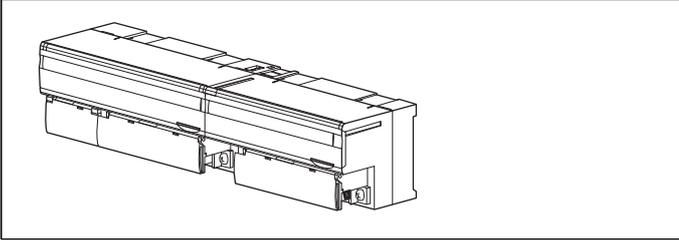

ORDERING INFORMATION

- Basic module: R7LWTU-2[1]1-AD4
Specify a code from below for [1].
(e.g. R7LWTU-221-AD4)

- Extension module: R7LWTU-EA8

MODEL: R7LWTU-2[1]1-AD4

CONFIGURATION

2: Single-phase / 2-wire and 3-wire,
3-phase / 3-wire and 4-wire

[1] NO. OF SYSTEMS

1: 1 system, Di / Pi x 4 (internal power 5 V)
(no connection with extension module)
2: 2 systems

INPUT

1: 240 V AC / CLSE

POWER INPUT

Universal

AD4: 100 - 240 V AC / 110 - 240 V DC (universal)
(Operational voltage range 85 - 264 V AC, 50 - 60 Hz /
99 - 264 V DC, ripple 10 %p-p max.)

EXTENSION MODULE: R7LWTU-EA8

I/O TYPE

EA8: Di / Pi, 8 points (internal power 5 V)

FUNCTIONS & FEATURES

The R7LWTU is a Multi Power Module for LonWorks.
The R7LWTU uses clamp-on current sensors, there is no
need of current transformers.

Current sensors are easy to install in existing systems. Wide
input range of 5 to 600 A is available.

All measured values, counter values, display mode, setting
data are stored in the non-volatile memory when power is
off.

A 'basic' module can be attached with an 'extension'
module (except R7LWTU-211-AD4) because of this, it is able
to use it as 2-circuit power and 8 discrete inputs module.

RELATED PRODUCTS

- PC configurator software (model: PMCFG)
- XIF File (Device Interface File)

XIF file is used to define a LonWorks device when
programmed on LonMaker.

The XIF files and Software are downloadable at M-System's
web site.

To connect the module to a PC a dedicated cable is required
(refer to M-System's web site or instruction manual).

- Clamp-on current sensor (model: CLSE)

The clamp-on current sensors, not included in this product
package, must be ordered separately. Required number
depends upon the system configuration.

GENERAL SPECIFICATIONS

Connection: M3 screw terminals (torque 0.5 N·m)

Recommended solderless terminal: Refer to the drawing on
the end of this section.

Applicable wire size: 0.3 to 0.75 mm²

Configuration: Single phase/2-wire and 3-wire, 3-phase/3-
wire balanced/unbalanced load, 3-phase/4-wire
balanced/unbalanced load

Screw terminal: Nickel-plated steel

Isolation: Sensor core to sensor output or current input or
voltage input to discrete input to LonWorks or FG to power

Measured variables

Voltage: 1-N, 2-N, 3-N, 1-2, 2-3, 3-1

Current: 1, 2, 3, N

Active / reactive: Σ

Power factor: Σ


Frequency

Active energy: Incoming

Reactive energy: Incoming

Status indicator LED: PWR

■ **Recommended terminal size (unit: mm)**



LonWorks COMMUNICATION

Neuron Chip: FT3150
 (NeuronID printed in numbers and bar code [peel-off code 39 format])
Transceiver: FT-X1 (equivalent to FTT10A)
Transmission speed: 78 kbps
 Twisted-pair cable
Distance, free topology: 500 meters
 Max. 64 nodes/channel
LNS: Ver. 3.0 Service Pack 8 or higher
Status indicator: ONLINE, ERR, TX/RX, SVCE (service)
Operation switch: Service, reset

INPUT SPECIFICATIONS

Frequency: 50 / 60 Hz (45 - 65 Hz)
• Voltage Input
Rated voltage
 Line-to-line (delta voltage): 240 V
 Line-neutral (phase voltage): 138 V
Consumption VA: $\leq U_{LN}^2 / 300 \text{ k}\Omega / \text{phase}$
Overload capacity: 200 % of rating for 10 sec., 120 % continuous
Selectable primary voltage range: 50 - 400 000 V
• Current Input
CLSE-R5: 0 - 5 A AC
CLSE-05: 0 - 50 A AC
CLSE-10: 0 - 100 A AC
CLSE-20: 0 - 200 A AC
CLSE-40: 0 - 400 A AC
CLSE-60: 0 - 600 A AC
Overload capacity: 120 % continuous, 500 % for 10 sec.
Selectable primary current range: 1 - 20 000 A (only with CLSE-R5, refer to the configurator settings)
Operational range
Current: 0 - 120 % of the rating
Voltage: 10 - 120 % of the rating
Active/reactive power: ± 120 % of the rating
Frequency: 45 - 65 Hz
Power factor: ± 1
■ Discrete input
Common: Negative common
Maximum frequency: 10 Hz
Minimum pulse width: 50 msec.
Totalized pulse range: 0 - 9 999 999
Count at overflow: Reset and restart at '0.'
Detecting voltage/current: 5 V DC / 5 mA approx.
Detecting levels: $\leq 5 \text{ k}\Omega / \leq 2 \text{ V}$ for ON;
 $\geq 100 \text{ k}\Omega / 4 \text{ V}$ for OFF
Operation mode: Discrete and pulse counter

INSTALLATION


Power consumption
•AC:
 Basic module: < 5 VA
 Basic with extension module: < 6 VA
•DC:
 Basic module: < 1.5 W
 Basic with extension module: < 2 W
Operating temperature: -10 to +55°C (14 to 131°F)
Storage temperature: -20 to +65°C (-4 to +149°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Atmosphere: No corrosive gas or heavy dust
Mounting: DIN rail
Weight:
 Basic module: 200 g (0.44 lbs)
 Extension module: 90 g (0.2 lbs)

PERFORMANCE

Accuracy (at 10 - 35°C or 50 - 95°F, 45 - 65 Hz)
 Add the accuracy of the current sensor for overall values.
Voltage: ± 0.5 % of the rating
Current: ± 0.5 % of the rating
Power: ± 1.0 % of the rating
Power factor: ± 1.5 %
Energy: ± 2.0 % of the rating (range 5 - 100 %, PF 1)
Frequency: ± 0.1 % of the rating
 The described accuracy levels are ensured at the input 1 % or more for phase 2 current with 3-phase/3-wire unbalanced load and for neutral current with 1-phase/3-wire.
Sampling time:
Frequency: ≤ 1 sec.
Other: ≤ 500 msec.
Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC
Dielectric strength:
 2000 V AC @ 1 minute (current input or voltage input or discrete input to LonWorks or FG to input power)
 1000 V AC @ 1 minute (current input or voltage input to discrete input)



EXTERNAL VIEW

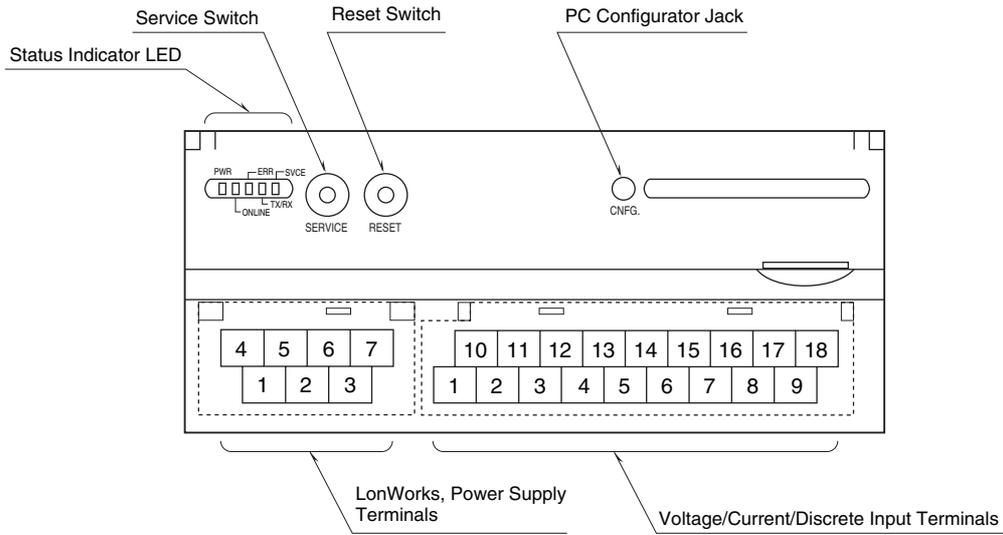

■ STATUS INDICATOR LED

LED	STATUS	COLOR	OPERATION
PWR	ON	Green	Internal power 5V normal operating
	OFF		Internal power 5V abnormality
ONLINE	ON	Green	Online
	Blink ≈ 2 Hz		Wink message received
	OFF		Abnormality
ERR	ON	Red	Writing in non-volatile memory
	Blink ≈ 0.5 Hz		No input or input overflow
	Blink ≈ 2 Hz		Abnormality
	OFF		Normal operating
TX/RX	ON	Green	In communication
	OFF		No connection
SVCE	ON	Green	Internal program error
	Blink ≈ 0.5 Hz		No network service
	OFF		Normal operating

TERMINAL CONNECTIONS

System / Application	Terminal	System / Application	Terminal
Single phase / 2-wire		Single phase / 3-wire Three phase / 3-wire unbalanced load (2CT)	
Three phase / 3-wire, balanced load		Three phase / 4-wire, balanced load	
Three phase / 4-wire, unbalanced load			

Caution: Use CLSE for CT.
Grounding is unnecessary for low-voltage circuit.

CONNECTION DIAGRAMS

POWER SUPPLY, LonWorks TERMINAL ASSIGNMENT


4	5	6	7
NET1	NET2	U (+)	V (-)
1	2	3	
NET1	NET2	FG	

NO.	ID	FUNCTION, NOTES
1	NET1	LonWorks communication 1
2	NET2	LonWorks communication 2
3	FG	FG
4	NET1	LonWorks communication 1
5	NET2	LonWorks communication 2
6	U (+)	Power input
7	V (-)	Power input

Note: LonWorks wiring must be paired between Net1 terminals and/or Net2 terminals.



■ HOST PC CONNECTION

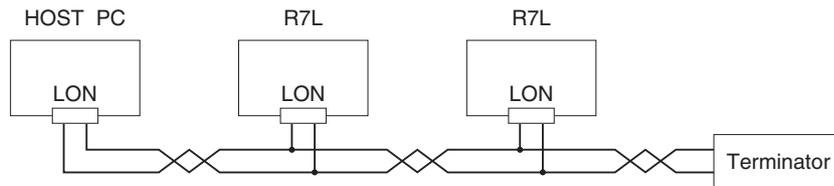

TERMINAL ASSIGNMENTS

■ BASIC MODULE

• 1 Circuit, 4 point discrete

10	11	12	13	14	15	16	17	18
P3	NC	NC	1ch 1K	1ch 2K	1ch 3K	DI1+	DI3+	COM
1	2	3	4	5	6	7	8	9
P1	P2	N	1ch 1L	1ch 2L	1ch 3L	DI2+	DI4+	COM

• 2 Circuits

10	11	12	13	14	15	16	17	18
P3	NC	NC	1ch 1K	1ch 2K	1ch 3K	1ch 1K	1ch 2K	1ch 3K
1	2	3	4	5	6	7	8	9
P1	P2	N	1L	2L	3L	1L	2L	3L

PIN No.	ID	FUNCTION	PIN No.	ID	FUNCTION
1	P1	Voltage Input P1	10	P3	Voltage Input P3
2	P2	Voltage Input P2	11	NC	Unused
3	N	Voltage Input N	12	NC	Unused
4	1ch 1L	1ch current input 1L	13	1ch 1K	1ch current input 1K
5	1ch 2L	1ch current input 2L	14	1ch 2K	1ch current input 2K
6	1ch 3L	1ch current input 3L	15	1ch 3K	1ch current input 3K
7	DI2 +	Discrete input 2	16	DI1 +	Discrete input 1
8	DI4 +	Discrete input 4	17	DI3 +	Discrete input 3
9	COM	Discrete input common	18	COM	Discrete input common

PIN No.	ID	FUNCTION	PIN No.	ID	FUNCTION
1	P1	Voltage Input P1	10	P3	Voltage Input P3
2	P2	Voltage Input P2	11	NC	Unused
3	N	Voltage Input N	12	NC	Unused
4	1ch 1L	1ch current input 1L	13	1ch 1K	1ch current input 1K
5	1ch 2L	1ch current input 2L	14	1ch 2K	1ch current input 2K
6	1ch 3L	1ch current input 3L	15	1ch 3K	1ch current input 3K
7	2ch 1L	2ch current input 1L	16	2ch 1K	2ch current input 1K
8	2ch 2L	2ch current input 2L	17	2ch 2K	2ch current input 2K
9	2ch 3L	2ch current input 3L	18	2ch 3K	2ch current input 3K

■ EXTENSION MODULE


6	7	8	9	10
COM	DI1+	DI3+	DI5+	DI7+
1	2	3	4	5
COM	DI2+	DI4+	DI6+	DI8+

PIN No.	ID	FUNCTION	PIN No.	ID	FUNCTION
1	COM	Common	6	COM	Common
2	DI2 +	Discrete input 2	7	DI1 +	Discrete input 1
3	DI4 +	Discrete input 4	8	DI3 +	Discrete input 3
4	DI6 +	Discrete input 6	9	DI5 +	Discrete input 5
5	DI8 +	Discrete input 8	10	DI7 +	Discrete input 7




EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

■ BASIC MODULE

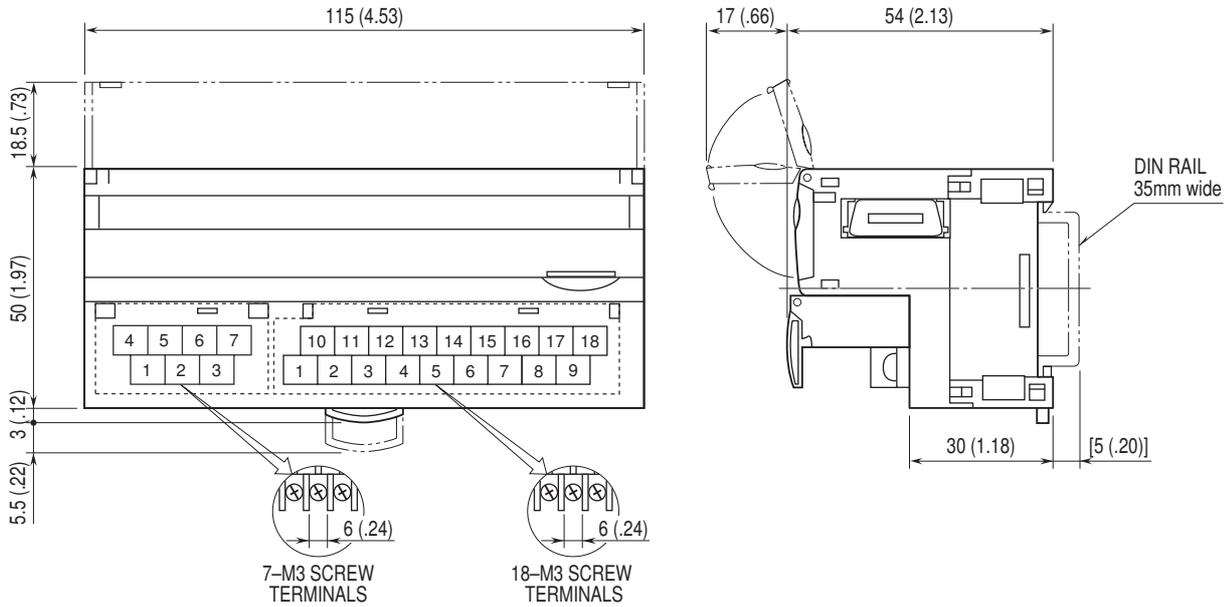


■ EXTENSION MODULES

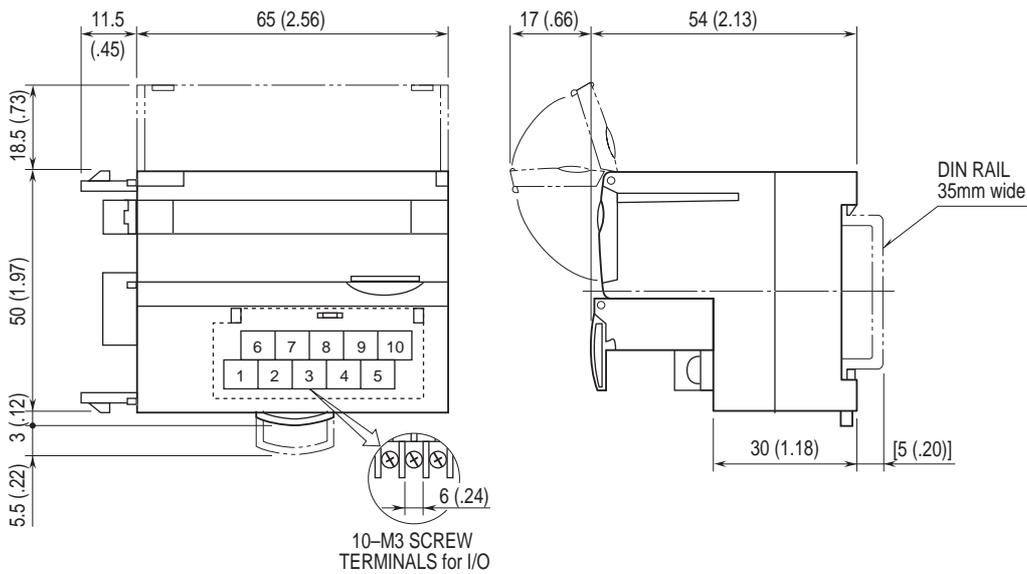


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM


- BASIC MODULE
- 1 Circuit, 4 point discrete

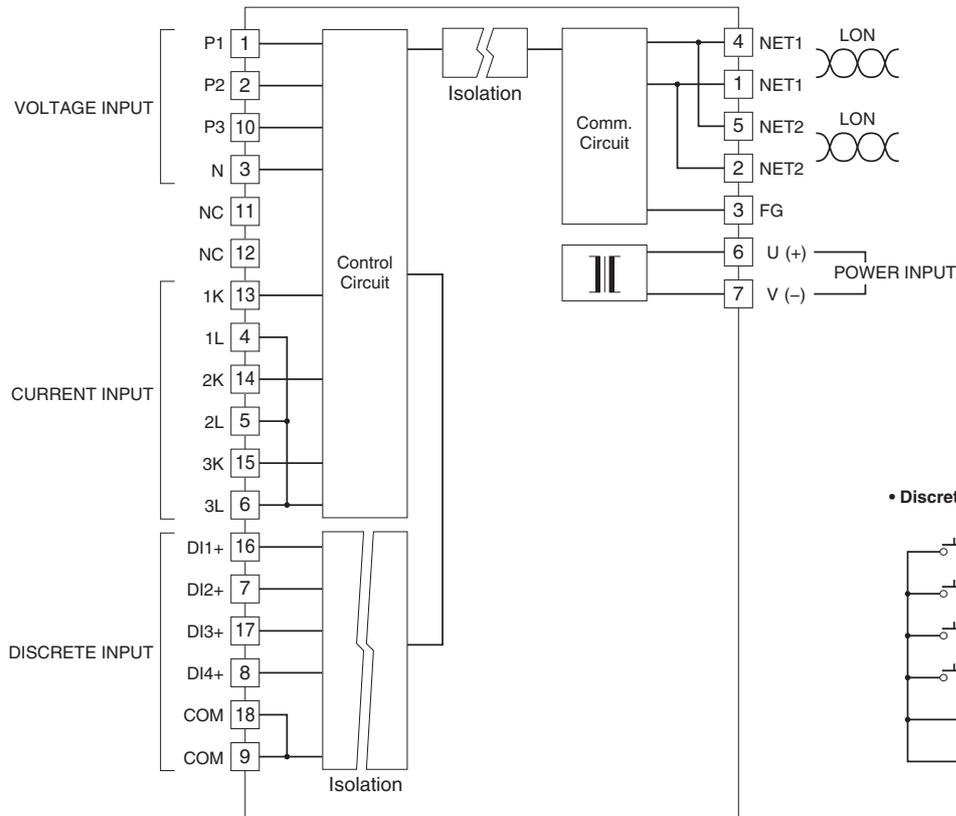

- 2 Circuits

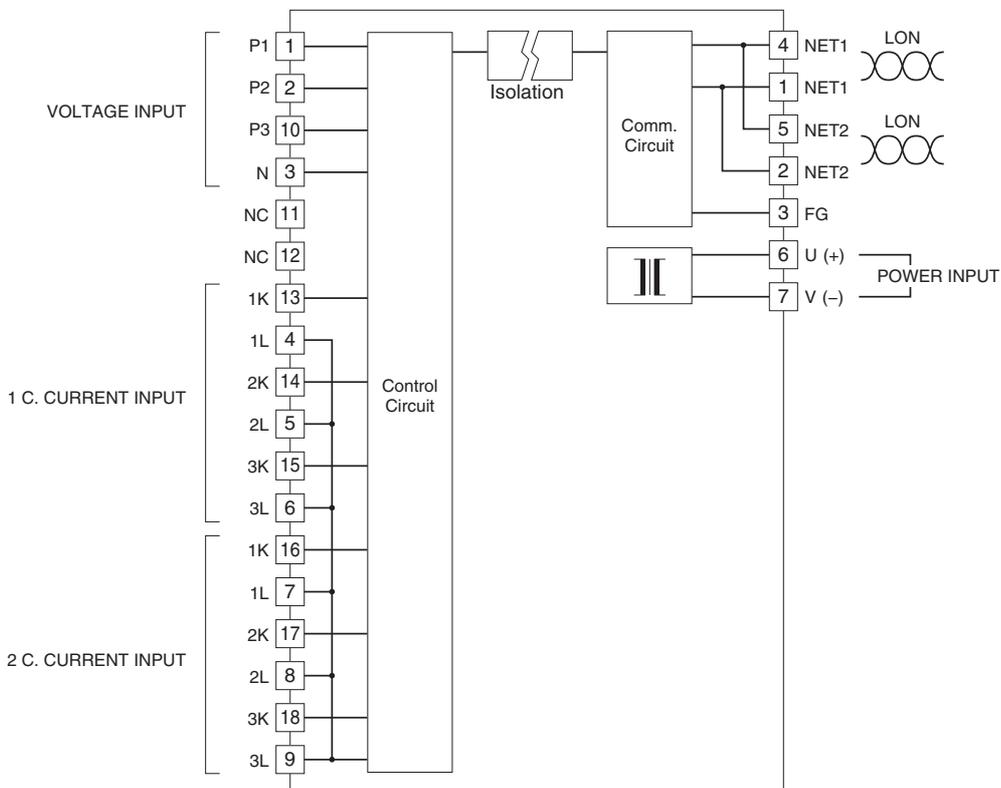

■ EXTENSION MODULE

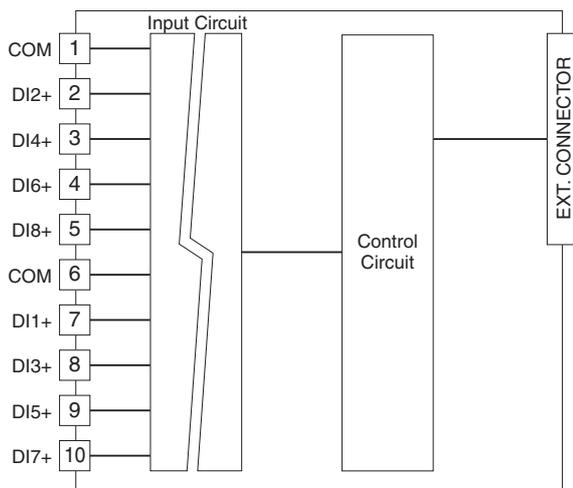

Specifications are subject to change without notice.

