


Remote I/O R3 Series

THERMOCOUPLE INPUT MODULE

(8 points, isolated)

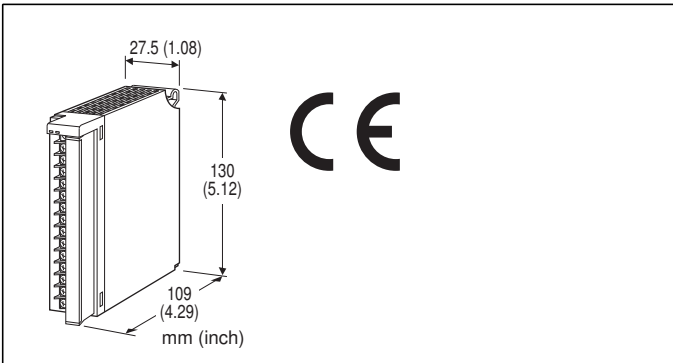

MODEL: R3-TS8[1][2]

ORDERING INFORMATION

- Code number: R3-TS8[1][2]
- Specify a code from below for each [1] and [2].
(e.g. R3-TS8W/CE/Q)
- Specify the specification for option code /Q
(e.g. /C01)

NO. OF CHANNELS

8: 8

[1] COMMUNICATION MODE

S: Single
W: Dual

[2] OPTIONS (multiple selections)

Standards & Approvals

blank: Without CE

/CE: CE marking

Other Options

blank: none

/Q: Option other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

GENERAL SPECIFICATIONS

Connection

Internal bus: Via the Installation Base (model: R3-BSx)

Input: M3 separable screw terminal (torque 0.5 N·m)

Internal power: Via the Installation Base
(model: R3-BSx)

Screw terminal: Nickel-plated steel

Isolation: Input 1 to input 2 to input 3 to input 4 to input 5 to input 6 to input 7 to input 8 to internal bus or internal power

Sensor type: Selectable with the side DIP SW

(Independent types selectable per group of 4 channels.)

Temperature unit: °C, °F or absolute temperature selectable with the side DIP SW

Conversion rate: Selectable with the side DIP SW

Burnout detection: Upscale or downscale selectable with the side DIP SW

Linearization: Standard

Cold junction compensation: CJC sensor attached to the input terminals

RUN indicator: Bi-color (red/green) LED;

Red when the bus A operates normally;

Green when the bus B operates normally;

Amber when both buses operate normally.

ERR indicator: Bi-color (red/green) LED;

Red with the input circuit abnormality (AD converter response failure);

Green in normal operating conditions.

INPUT SPECIFICATIONS

Input resistance: 30 kΩ min.

Burnout sensing: 0.1 μA

Temperature range

T/C	°C	
	USABLE RANGE	CONFORMANCE RANGE
K (CA)	-272 to +1472	-150 to +1370
E (CRC)	-272 to +1020	-170 to +1000
J (IC)	-260 to +1300	-180 to +1200
T (CC)	-272 to +500	-170 to +400
B (RH)	24 to 1920	400 to 1760
R	-100 to +1860	200 to 1760
S	-100 to +1860	0 to 1760
C (WRe 5-26)	-52 to +2416	0 to 2315
N	-272 to +1400	-130 to +1300
U	-252 to +600	-200 to +600
L	-252 to +1000	-200 to +900
P (Platinel II)	-52 to +1496	0 to 1395
(PR)	-52 to +1860	0 to 1760
T/C	°F	
	USABLE RANGE	CONFORMANCE RANGE
K (CA)	-458 to +2682	-238 to +2498
E (CRC)	-458 to +1868	-274 to +1832
J (IC)	-436 to +2372	-292 to +2192
T (CC)	-458 to +932	-274 to +752
B (RH)	75 to 3488	752 to 3200
R	-148 to +3380	392 to 3200
S	-148 to +3380	32 to 3200
C (WRe 5-26)	-62 to +4381	32 to 4199
N	-458 to +2552	-202 to +2372
U	-422 to +1112	-328 to +1112
L	-422 to +1832	-328 to +1652
P (Platinel II)	-62 to +2725	32 to 2543
(PR)	-62 to +3380	32 to 3200

Max. (upscale) or min. (downscale) value of the usable range when a burnout is detected.



INSTALLATION

Operating temperature: -10 to +55°C (14 to 131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Atmosphere: No corrosive gas or heavy dust
Mounting: Installation Base (model: R3-BSx)
Weight: 250 g (0.55 lb)

PERFORMANCE

Conversion accuracy: ±1.0°C (±1.8°F) except ±2.0°C (±3.6°F) for B, R, S, C, PR
Conversion rate: 250 msec. or 1 sec. selectable
Data range
°C, absolute temperature: Engineering unit value × 10 (integer)
°F: Engineering unit value (integer)
Data allocation: 8
Current consumption: 100 mA
Cold junction compensation error:
 ±1.0°C max. (at 25°C ±10°C)
 ±1.8°F max. (at 77°F ±18°F)
 (±1.5°C or ±2.7°F for R, S, PR)
Temp. coefficient: ±0.015 %/°C (±0.008 %/°F)
Burnout response time: ≤ 2 sec.
Insulation resistance: ≥ 100 MΩ with 500 V DC
Dielectric strength: 1000 V AC @ 1 minute (input 1 to input 2 to input 3 to input 4 to input 5 to input 6 to input 7 to input 8 to internal bus or internal power)
 2000 V AC @ 1 minute (power input to FG; isolated on the power supply module)


STANDARDS & APPROVALS

CE conformity:
 EMC Directive (2004/108/EC)
 EMI EN 61000-6-4: 2007/A1: 2011
 EMS EN 61000-6-2: 2005


EXTERNAL VIEW

■ SIDE VIEW


■ FRONT VIEW

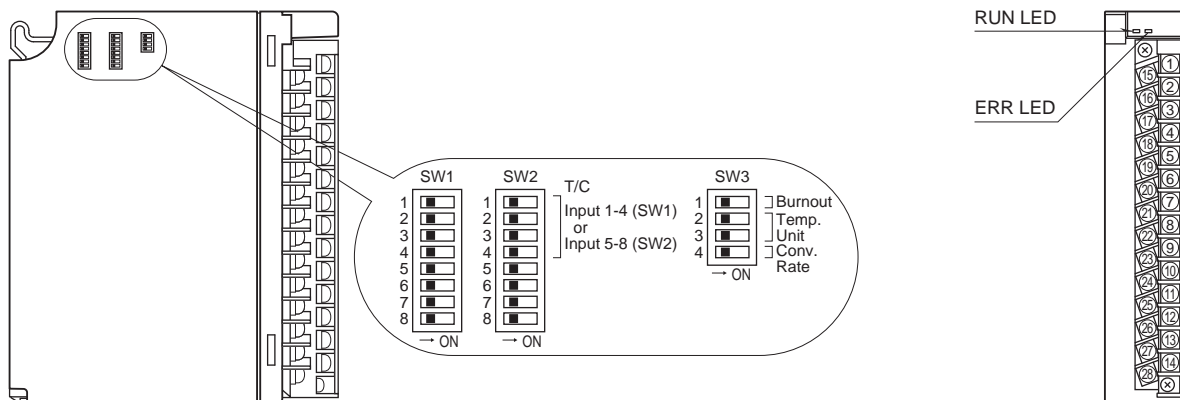

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

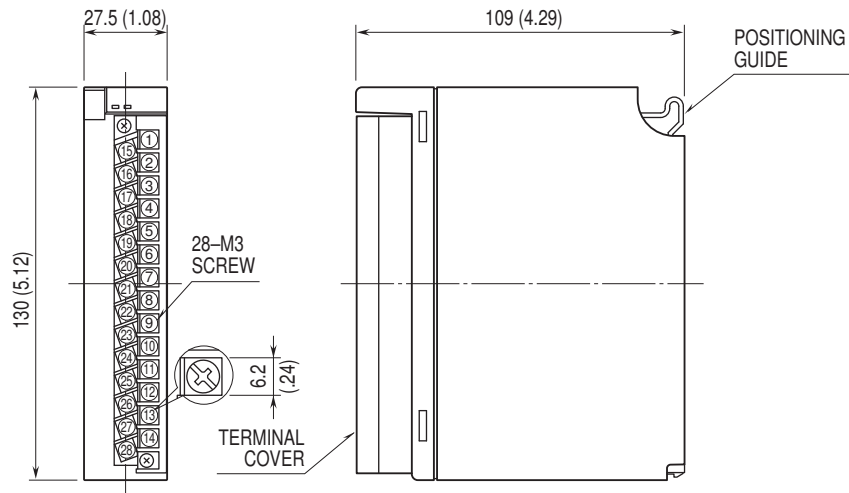


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

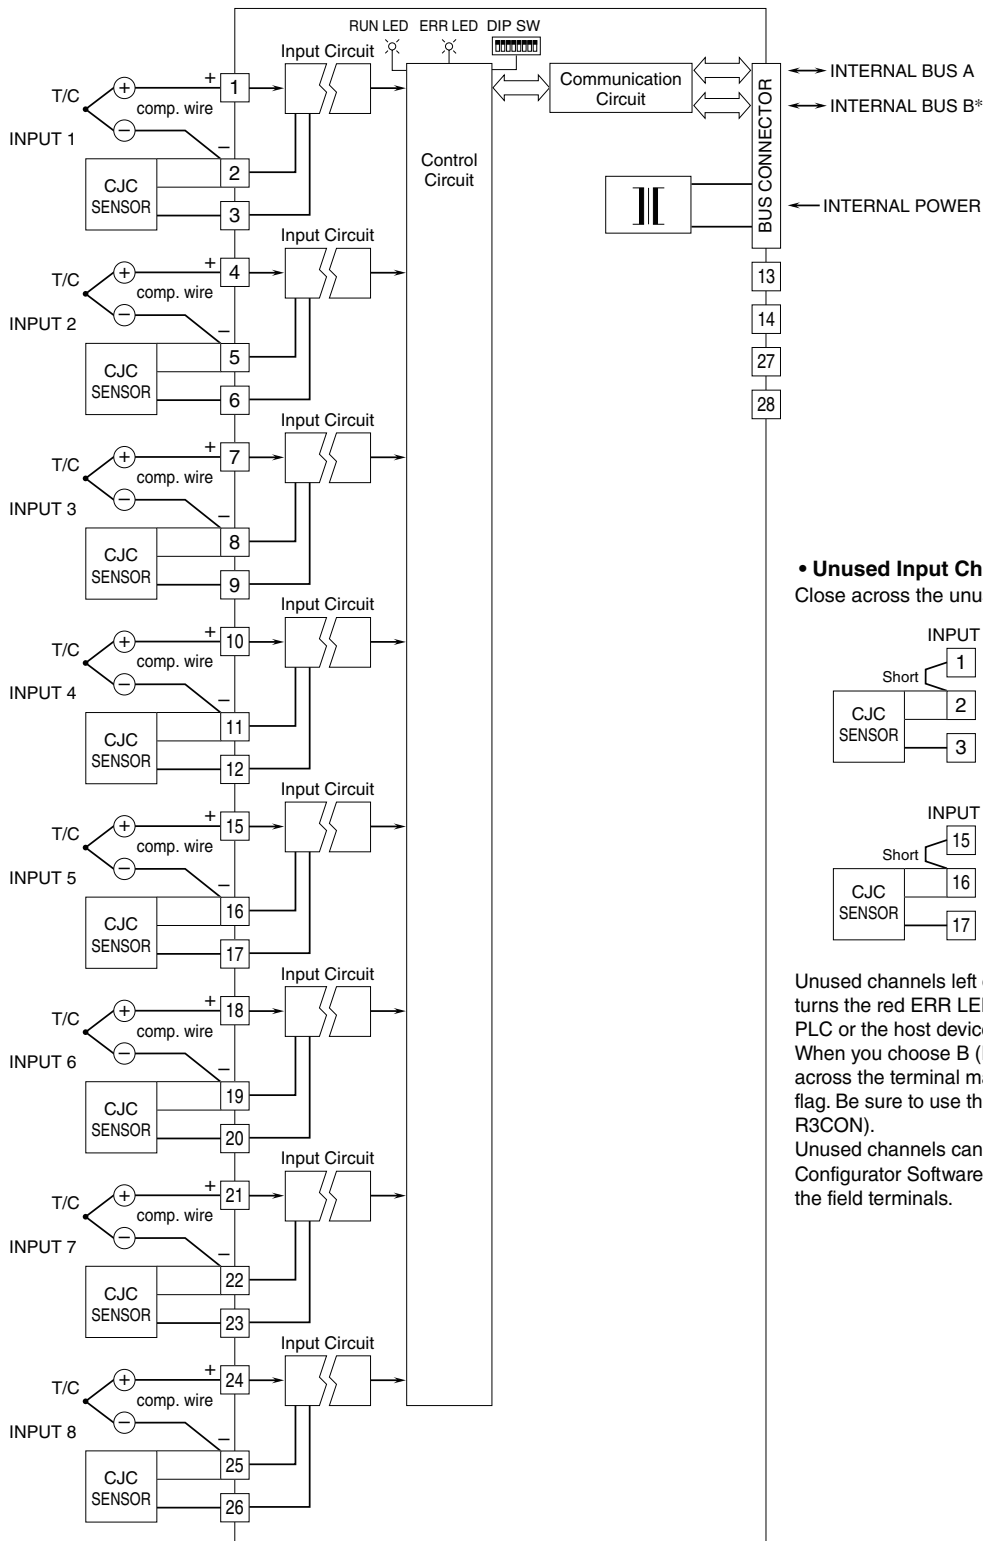

*For dual redundant communication.

• Unused Input Channels

Close across the unused input terminals as shown below.

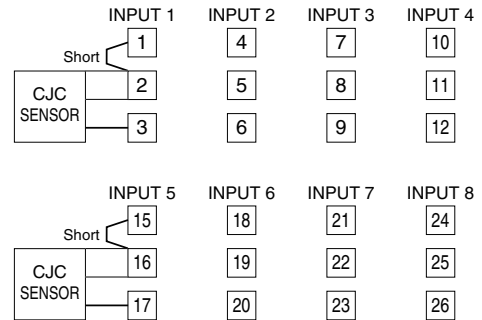

Unused channels left open are equal to the burnout, which turns the red ERR LED on and sets a burnout flag at the PLC or the host device.

When you choose B (RH) thermocouple, shortcircuiting across the terminal may not be effective to cancel the burnout flag. Be sure to use the PC Configurator Software (model: R3CON).

Unused channels can be specified and set so on the PC Configurator Software without needing to connect resistors at the field terminals.



Specifications are subject to change without notice.



幸託有限公司
XIN TOP CORPORATION

TEL : (02)2598-1199
FAX : (02)2596-2331

E-mail : info@xintop.com
Website : www.xintop.com