

## Space-saving Plug-in Signal Conditioners F-UNIT

### RATIO TRANSMITTER


(with output bias; thumbwheel switch adjustments)

#### Functions & Features

- Providing precise matching of DC control signals to final control elements in open- or closed-loop systems
- Easy thumbwheel switch adjustments
- Ratio adjustable from 0.1 to 3.99
- Bias adjustable within  $\pm 99\%$
- High-density mounting

#### Typical Applications

- Ratio control for air/fuel flows or for two flows
- Gain calculation for manipulated variable from a controller
- Large scale signal span adjustment



## MODEL: FRTD-[1]-[2][3]-[4]

### ORDERING INFORMATION

- Code number: FRTD[1]-[2][3]-[4]
- Specify a code from below for each [1] through [4] (e.g. FRTD-S-AA-L)
- Special input and output ranges (For codes Z & 0)

### [1] OUTPUT CHARACTERISTICS

- S: Positive  
R: Negative

### [2] INPUT

#### Current

- A: 4 - 20 mA DC (Input resistance 250  $\Omega$ )  
**A1**: 4 - 20 mA DC (Input resistance 50  $\Omega$ )  
 B: 2 - 10 mA DC (Input resistance 500  $\Omega$ )  
 C: 1 - 5 mA DC (Input resistance 1000  $\Omega$ )  
 D: 0 - 20 mA DC (Input resistance 50  $\Omega$ )  
 E: 0 - 16 mA DC (Input resistance 62.5  $\Omega$ )  
 F: 0 - 10 mA DC (Input resistance 100  $\Omega$ )  
 G: 0 - 1 mA DC (Input resistance 1000  $\Omega$ )  
 H: 10 - 50 mA DC (Input resistance 100  $\Omega$ )

- J: 0 - 10  $\mu$ A DC (Input resistance 1000  $\Omega$ )  
 K: 0 - 100  $\mu$ A DC (Input resistance 1000  $\Omega$ )  
**GW**: -1 - +1 mA DC (Input resistance 1000  $\Omega$ )  
**FW**: -10 - +10 mA DC (Input resistance 100  $\Omega$ )  
 Z: Specify current (See INPUT SPECIFICATIONS)

#### Voltage

- 1: 0 - 10 mV DC (Input resistance 10 k $\Omega$  min.)  
**15**: 0 - 50 mV DC (Input resistance 10 k $\Omega$  min.)  
**16**: 0 - 60 mV DC (Input resistance 10 k $\Omega$  min.)  
 2: 0 - 100 mV DC (Input resistance 100 k $\Omega$  min.)  
 3: 0 - 1 V DC (Input resistance 1 M $\Omega$  min.)  
 4: 0 - 10 V DC (Input resistance 1 M $\Omega$  min.)  
 5: 0 - 5 V DC (Input resistance 1 M $\Omega$  min.)  
 6: 1 - 5 V DC (Input resistance 1 M $\Omega$  min.)  
**4W**: -10 - +10 V DC (Input resistance 1 M $\Omega$  min.)  
**5W**: -5 - +5 V DC (Input resistance 1 M $\Omega$  min.)  
 0: Specify voltage (See INPUT SPECIFICATIONS)

### [3] OUTPUT

#### Current

- A: 4 - 20 mA DC (Load resistance 750  $\Omega$  max.)  
 B: 2 - 10 mA DC (Load resistance 1500  $\Omega$  max.)  
 C: 1 - 5 mA DC (Load resistance 3000  $\Omega$  max.)  
 D: 0 - 20 mA DC (Load resistance 750  $\Omega$  max.)  
 E: 0 - 16 mA DC (Load resistance 900  $\Omega$  max.)  
 F: 0 - 10 mA DC (Load resistance 1500  $\Omega$  max.)  
 G: 0 - 1 mA DC (Load resistance 15 k $\Omega$  max.)  
 Z: Specify current (See OUTPUT SPECIFICATIONS)

#### Voltage

- 1: 0 - 10 mV DC (Load resistance 10 k $\Omega$  min.)  
 2: 0 - 100 mV DC (Load resistance 100 k $\Omega$  min.)  
 3: 0 - 1 V DC (Load resistance 1000  $\Omega$  min.)  
 4: 0 - 10 V DC (Load resistance 10 k $\Omega$  min.)  
 5: 0 - 5 V DC (Load resistance 5000  $\Omega$  min.)  
 6: 1 - 5 V DC (Load resistance 5000  $\Omega$  min.)  
**4W**: -10 - +10 V DC (Load resistance 10 k $\Omega$  min.)  
**5W**: -5 - +5 V DC (Load resistance 5000  $\Omega$  min.)  
 0: Specify voltage (See OUTPUT SPECIFICATIONS)

### [4] POWER INPUT

#### AC Power

- K: 85 - 132 V AC  
 (Operational voltage range 85 - 132 V, 47 - 66 Hz)  
 L: 170 - 264 V AC  
 (Operational voltage range 170 - 264 V, 47 - 66 Hz)

#### DC Power

- R: 24 V DC  
 (Operational voltage range 24 V  $\pm 10\%$ , ripple 10 %p-p max.)  
 P: 110 V DC  
 (Operational voltage range 85 - 150 V, ripple 10 %p-p max.)




## GENERAL SPECIFICATIONS

**Construction:** Plug-in  
**Connection:** M3.5 screw terminals (torque 0.8 N·m)  
**Screw terminal:** Nickel-plated steel  
**Housing material:** Flame-resistant resin (black)  
**Isolation:** Input to output to power  
**Overrange output:** Approx. -10 to +120 % at 1 - 5 V  
**Zero adjustment:** -5 to +5 % (front)  
**Span adjustment:** 95 to 105 % (front)  
**Equation:**  $X_o = KX_i + B$  for positive ratio;  
 $X_o = F - KX_i + B$  for negative ratio  
 where  $X_o$  : output (%)  
 $X_i$  : input (%)  
 $K$ : ratio  
 (0.1 - 3.99 conformance range)  
 $B$ : bias (-99 - +99 %)  
 $F$ : 100 %  
 (factory setting:  $K = 1, B = 0$  %)

**Ratio/bias adjustment:** 3-digit thumbwheel switches


### [Examples of Positive Gain]

- ①  $K = 1$      $B = 50\%$
- ②  $K = 0.5$     $B = 50\%$
- ③  $K = 2$       $B = 0$
- ④  $K = 1$       $B = 0$
- ⑤  $K = 0.5$     $B = 0$
- ⑥  $K = 1$       $B = -50\%$



### [Examples of Negative Gain]

- ①  $K = 1$      $B = 50\%$
- ②  $K = 0.5$     $B = -50\%$
- ③  $K = 2$       $B = 0$
- ④  $K = 1$       $B = 0$
- ⑤  $K = 0.5$     $B = 0$
- ⑥  $K = 1$       $B = -50\%$



## INPUT SPECIFICATIONS

■ **DC Current:**  
 Shunt resistor attached to the input terminals (0.5 W)  
 Specify input resistance value for code Z.

■ **DC Voltage:** -300 - +300 V DC

**Minimum span:** 3 mV

**Offset:** Max. 1.5 times span

**Input resistance**

Span 3 - 10 mV :  $\geq 10$  k $\Omega$   
 Span 10 - 100 mV :  $\geq 10$  k $\Omega$   
 Span 0.1 - 1 V :  $\geq 100$  k $\Omega$   
 Span  $\geq 1$  V :  $\geq 1$  M $\Omega$

## OUTPUT SPECIFICATIONS

■ **DC Current:** 0 - 20 mA DC

**Minimum span:** 1 mA

**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 15 V max.  
 ■ **DC Voltage:** -10 - +12 V DC  
**Minimum span:** 5 mV  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 1 mA max. at  $\geq 0.5$  V

## INSTALLATION

### Power input

• **AC:** Approx. 4.5 VA  
 • **DC:** 24 V approx. 70 mA  
 110 V approx. 20 mA  
**Operating temperature:** -5 to +55°C (23 to 131°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Mounting:** Surface or DIN rail; Standard Rack Mounting  
 Frame BX-16H available  
**Weight:** 200 g (0.44 lbs)

## PERFORMANCE in percentage of span

**Ratio setting accuracy:**  $\pm 0.2$  %  
 (at 0.1 - 3.99 conformance range)

**Bias setting accuracy:**  $\pm 1$  %

**Accuracy:**  $\pm 0.3$  % (with ratio = 1, bias = 0 %)

**Temp. coefficient:**  $\pm 0.015$  %/°C ( $\pm 0.008$  %/°F)

**Response time:**  $\leq 0.5$  sec. (0 - 90 %)

**Line voltage effect:**  $\pm 0.1$  % over voltage range

**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC


**Dielectric strength**

**Power input code R:**  
 1000 V AC @ 1 minute (input to output)  
 2000 V AC @ 1 minute (input or output or power to ground)  
 500 V AC @ 1 minute (I/O to power)


**Power input code K, L, P:**  
 1000 V AC @ 1 minute (input to output)  
 2000 V AC @ 1 minute (input or output or power to ground)  
 1500 V AC @ 1 minute (I/O to power)



**EXTERNAL VIEW**




**DIMENSIONS unit: mm (inch)**

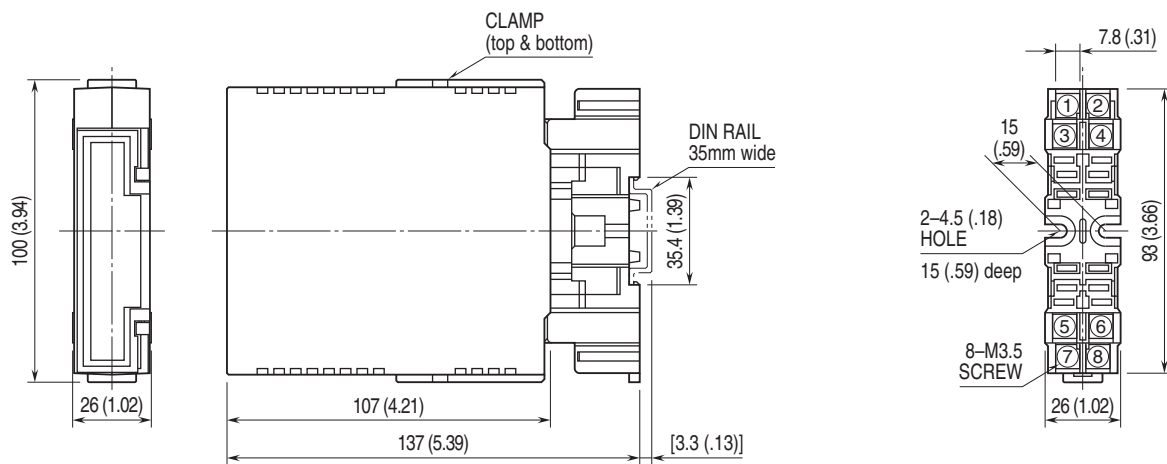

•When mounting, no extra space is needed between units.


**TERMINAL ASSIGNMENTS unit: mm (inch)**

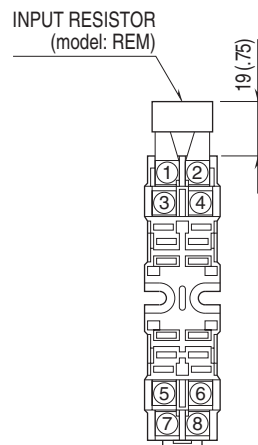

Input shunt resistor attached for current input.



**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

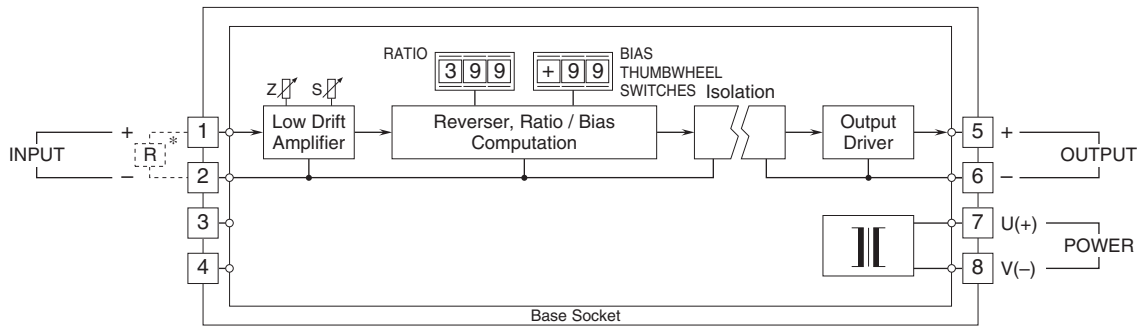

\*Input shunt resistor attached for current input.



Specifications are subject to change without notice.

