

Plug-in Signal Conditioners M-UNIT


2-WIRE ANGLE SENSOR TRANSMITTER

Functions & Features

- Converting a voltage input from Angle Sensor (model: NRA) into a standard process signal proportional to the angle
- Compact 2-wire design

Typical Applications

- Tank levels
- Positions

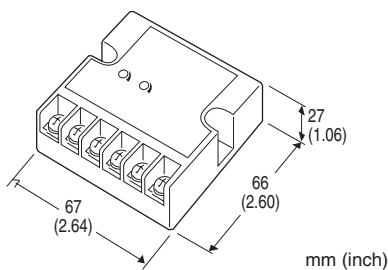

MODEL: PNT-[1]

ORDERING INFORMATION

- Code number: PNT-[1]
- Specify a code from below for [1].
(e.g. PNT-1)

[1] ACTION

- 1: Direct (output increases with input increase)
- 2: Reverse (output increases with input decrease)

RELATED PRODUCTS

- Brushless angle sensor (model: NRA)

GENERAL SPECIFICATIONS


- Construction:** Flat box
- Connection:** M4 screw terminals (torque 1.2 N·m)
- Screw terminal:** Nickel-plated brass
- Housing material:** Flame-resistant resin (black)
- Zero adjustments:** 45 - 55 % of linearity-assured range of the angle sensor
The Zero indicates such input where the transmitter outputs 12 mA.
- Span adjustments:** 50 - 100 % of linearity-assured range of the angle sensor

INPUT SPECIFICATIONS

- Input:** 2 - 3 V DC (output from Angle Sensor)
- Excitation:** 5 V DC ± 0.5 %

OUTPUT SPECIFICATIONS

- Output:** 4 - 20 mA DC
- Load resistance vs. supply voltage:**
Load Resistance (Ω) = (Supply Voltage (V) - 12 (V)) \div 0.02 (A) (including leadwire resistance)

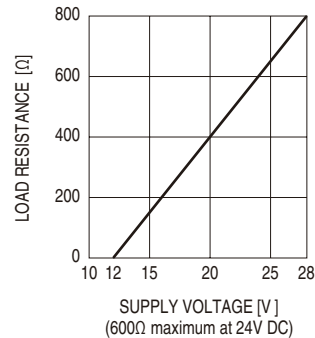

INSTALLATION


- Supply voltage:** 12 - 28 V DC
- Operating temperature:** -5 to +60°C (23 to 140°F)
- Operating humidity:** 30 to 90 %RH (non-condensing)
- Mounting:** Surface
- Weight:** 100 g (3.53 oz)

PERFORMANCE in percentage of span

- Accuracy:** ± 0.2 %
- Temp. coefficient:** ± 0.02 %/°C (± 0.01 %/°F)
- Response time:** ≤ 0.5 sec. (0 - 90 %)




EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

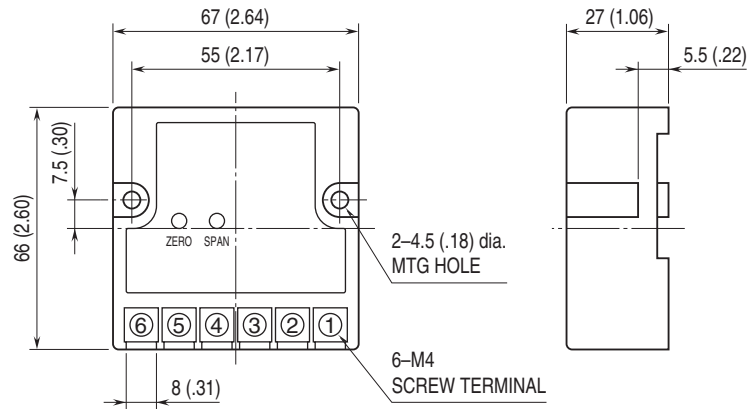

•When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

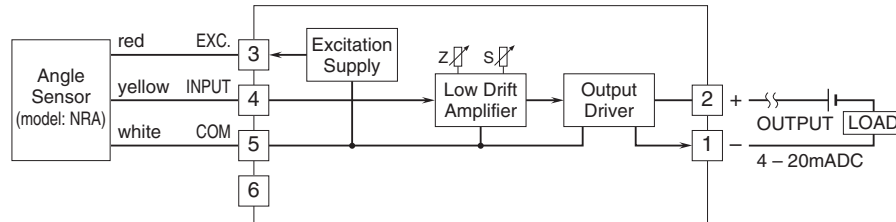

Specifications are subject to change without notice.