


Temperature

NTC sensor with handle FNA 106 LxxxxH

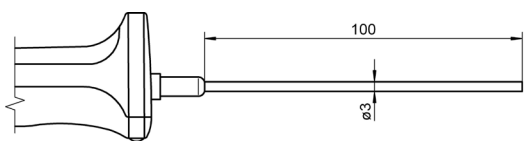


For immersion measurement

Accuracy: NTC, see page 07.04
Measuring tip: Operative range -20...+100 °C
Sheath element, stainless steel
 T_{90} : * 8 s
Handle: * 127 mm
Cable: 1.5 m PVC

L = 100 mm **Order no. FNA106L0100H**

NTC sensor with handle FNA 123 LxxxxH

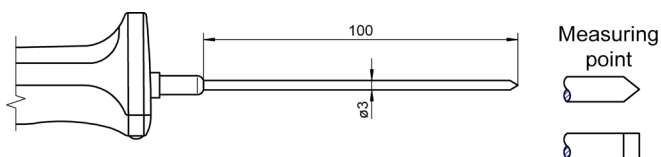


For immersion measurement in plastic and pasty substances

Accuracy: NTC, see page 07.04
Measuring tip: Operative range -20...+100 °C
Penetrating tip
 T_{90} : * 8 s
Handle: * 127 mm
Cable: 1.5 m PVC

L = 100 mm **Order no. FNA123L0100H**

NTC sensor with handle FNA 124 LxxxxH

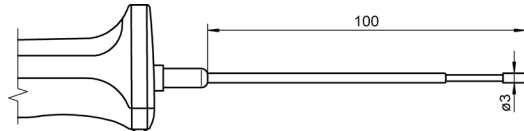

For surface measurement and immersion measurement

Accuracy: NTC, see page 07.04
Measuring tip: Operative range -20...+100 °C
Silver rivet, level
 T_{90} : * 10 s
Handle: * 127 mm
Cable: 1.5 m PVC

L = 100 mm **Order no. FNA124L0100H**

NTC sensor FNA 305



For room air measurement

Accuracy: NTC, see page 07.04
Measuring tip: Operative range -10...+60°C
(non-condensing), Protective tube
in stainless steel
diameter = 3.0mm, length = 50mm
mounted directly on ALMEMO® connector
 T_{90} : 8 s

L = 50 mm **Order no. FNA305**
(No variants available)




幸託有限公司
XIN TOP CORPORATION

TEL : (02)2598-1199
FAX : (02)2596-2331


E-mail : info@xintop.com
Website : www.xintop.com

Temperature

NTC sensor FNA 611

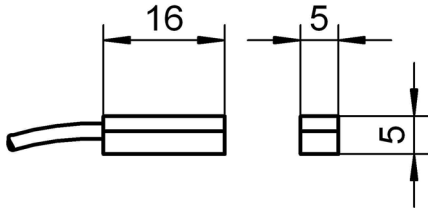

For surface measurement

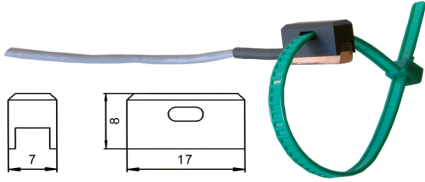

Accuracy: NTC, see page 07.04
Measuring tip: Operative range -10...+90 °C
Copper, level
T₉₀: * 20 s
Cable: 2 m PVC

Surface sensor **Order no. FNA611**

Accessories
Fixture for fastening
with cable ties

Best-Nr. ZB9611RM

NTC sensor FN 0001 K



Unprotected sensor element with cable



Accuracy: NTC, see page 07.04
Measuring tip: Sensor element, unprotected
Operative range: -20...+100°C
Connection wires: appr. 180 mm, fluoropolymer insulation
Connecting cable: 2 meters, PVC, thin stranded pick-up
wire, Operative range -10 to +90 °C
Cable juncture, in shrink-fit

NTC sensor with cable,
free ends

Order no. FN0001K

Option:

ALMEMO® connector including assembly


Single connectors for 1 sensor

Order no. OT9040AS

Double connector for 2 sensors

Order no. OT9040AS2

NTC sensor element FN 0001



Unprotected sensor element for constructing your own sensors

Accuracy: NTC, see page 07.04
Measuring tip: Operative range -20...+100 °C
Sensor
Connection wires 180 mm, fluoropolymer insulation

Sensor

Order no. FN0001



幸託有限公司
XIN TOP CORPORATION

TEL : (02)2598-1199

FAX : (02)2596-2331

E-mail : info@xintop.com

Website : www.xintop.com