MODEL: FCN32

Website: www.xintop.com

FAX: (02)2596-2331

CABLE (with FCN connectors)

(40-pin to 32-pin, shielded)

MODEL: FCN32-[1]

ORDERING INFORMATION

• Code number: FCN32-[1] Specify a code from below for [1]. (e.g. FCN32-10)

[1] CABLE LENGTH

03: Cable with connectors at both ends L = 30 cm (11.8 in.) 05: Cable with connectors at both ends L = 50 cm (1.6 ft.) 10: Cable with connectors at both ends L = 1 m (3.3 ft.) 20: Cable with connectors at both ends L = 2 m (6.6 ft.)

RELATED PRODUCTS

PC Recorder (model: R1M-A1C1)PC Recorder (model: R1M-D1C1)

GENERAL SPECIFICATIONS

Side A Connector Model

Connector model: FCN-361J040-AU
Cover model: FCN-360C040-B
Side B Connector Model

Connector model: FCN-361J032-AUCover model: FCN-360C032-B

Cable: Shielded cable with 40 core cables


PERFORMANCE

Maximum current: 0.2 A

Dielectric strength: 500 V AC @ 1 minute

MODEL: FCN32

EXTERNAL DIMENSIONS & CONNECTOR PIN ASSIGNMENT mm (inch)

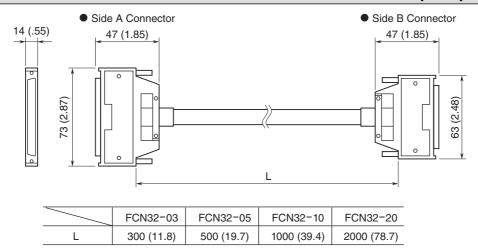


■ CONNECTOR PIN ASSIGNMENT

■ Side A Connector■ Side B Connector

A B 20 20 A 16

■ WIRING DIAGRAM





Specifications are subject to change without notice.

幸託有限公司

XIN TOP CORPORATION

TEL: (02)2598-1199 E-mail: info@xintop.com

FAX: (02)2596-2331 Website: www.xintop.com