

DCS Input/Output Relay Card Series

INPUT RELAY CARD

MODEL **38BIS8**

MODEL & SUFFIX CODE SELECTION

MODEL _____ **38BIS8** -R

TEST SWITCH _____

0 : Without
1 : With (AUTO at the center)

POWER INPUT _____

R : 24V DC

ORDERING INFORMATION

Specify code number. (e.g. 38BIS8-1-R)

RELATED PRODUCTS

•Standard Rack (model: 38B□)

GENERAL SPECIFICATIONS

Construction: rack mounted; terminal access via screw terminals at the front and via connector at the rear; terminal cover provided

Connection

Input & re-transmitted output: M3.5 screw terminals (nickel-plated steel; torque 0.8 N·m)

Output: connector

Power input: supplied from connector

Isolation: input or power to output to re-transmitted output

INPUT & OUTPUT

■**INPUT:** dry contact or open collector
24V DC @40mA min.
ON resistance $\leq 200\Omega$
OFF resistance $\geq 100k\Omega$

■**OUTPUT:** dry contact

Rating

Output: 30V DC @0.3A (resistive load)

Re-transmitted output: 250V AC @3A (cos ϕ =1)
30V DC @3A (resistive load)

Minimum switching load: 5V DC @10mA

Relay life

Mechanical: 5×10^7 cycles

Electrical: 10^5 cycles

Relay protection: external protection recommended when driving an inductive load (coil etc.)

INSTALLATION

Power input: 24V DC $\pm 10\%$, approx. 70mA
(ripple 10% p-p max.)

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90% RH (non-condensing)

Mounting: Standard Rack 38B□

Dimensions: W24×H110×D110 mm
(0.94"×4.33"×4.33")

Weight: 150 g (0.33 lbs)


PERFORMANCE

Insulation resistance: $\geq 100M\Omega$ with 500V DC

Dielectric strength: 1500V AC @1 minute

(input or power to output to re-transmitted output to gnd)

FRONT VIEW

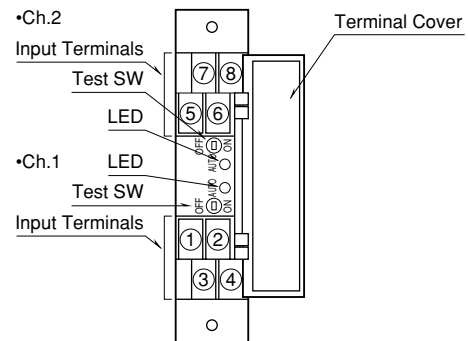

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

