

IrDA COMMUNICATION ADAPTOR

(PC Configurator use)

Functions & Features

- Communication adaptor used to configure M-System's products equipped with an IrDA port (e.g. model 71VR1, SC100) from a PC
- USB connection to the PC

MODEL: COP-IRDA[1]

ORDERING INFORMATION

- Code number: COP-IRDA[1]

Specify a code from below for [1].

(e.g. COP-IRDA/C144)

[1] OPTIONS

Holder (must be specified)

/CL: Adaptor with L Type holder

/C96: Adaptor with holder for 96 mm height

/C144: Adaptor with holder for 144 mm height

/C: Adaptor only

/NL: L Type holder only

/N96: Holder (for 96 mm height) only

/N144: Holder (for 144 mm height) only

OPTIONS	AVAILABLE MODELS
/C96 /N96	71VR
/C144 /N144	SC100 SC200 SC110 SC210

RELATED PRODUCTS

- Driver software

Software downloadable at M-System's web site.

GENERAL SPECIFICATIONS

Connection: USB Type A connector

Housing material: Resin (black)

COMMUNICATION

Standard: USB, IrDA

IrDA communication distance: Max. 20 cm

CONNECTED DEVICE

USB: PC/AT compatible

OS (Windows 7 (32-bit, 64-bit), Windows Vista (32-bit), Windows XP)

IrDA: M-System's related IrDA products.

INSTALLATION

Supply voltage: 4.75 – 5.25 V DC, approx. 100mA
(supplied through USB port)

Operating temperature: -5 to +60°C (23 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Weight:

/CL: 110g (3.9 oz)

/C96: 100g (3.5 oz)

/C144: 160g (5.6 oz)

/C: 60g (2.1 oz)

/NL: 50g (1.8 oz)


/N96: 40g (1.4 oz)

/N144: 100g (3.5 oz)





DIMENSIONS unit: mm (inch)

■ COMMUNICATION ADAPTOR




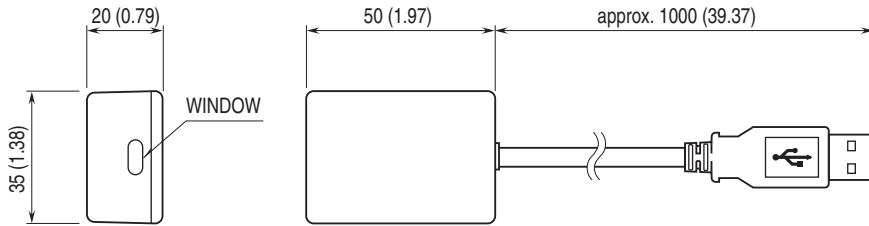


■ HOLDER

- L Type

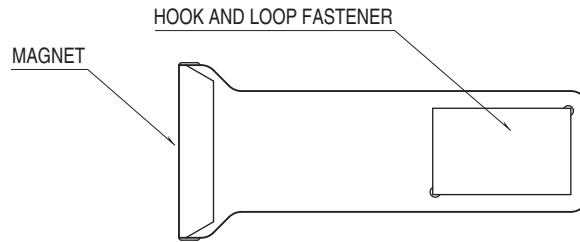


- For 96mm (3.78)

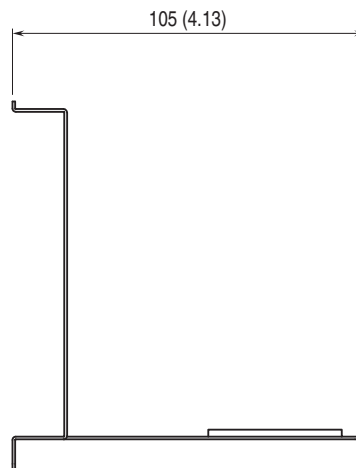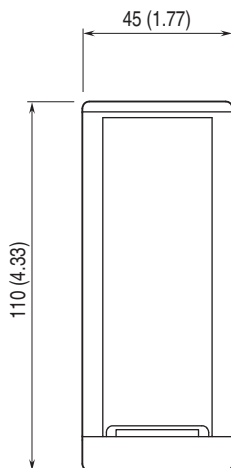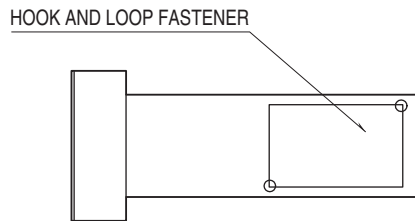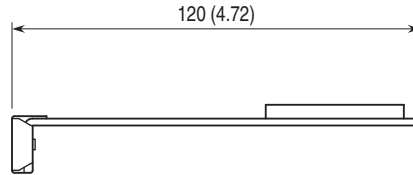

MODEL: COP-IRDA

• For 144mm height

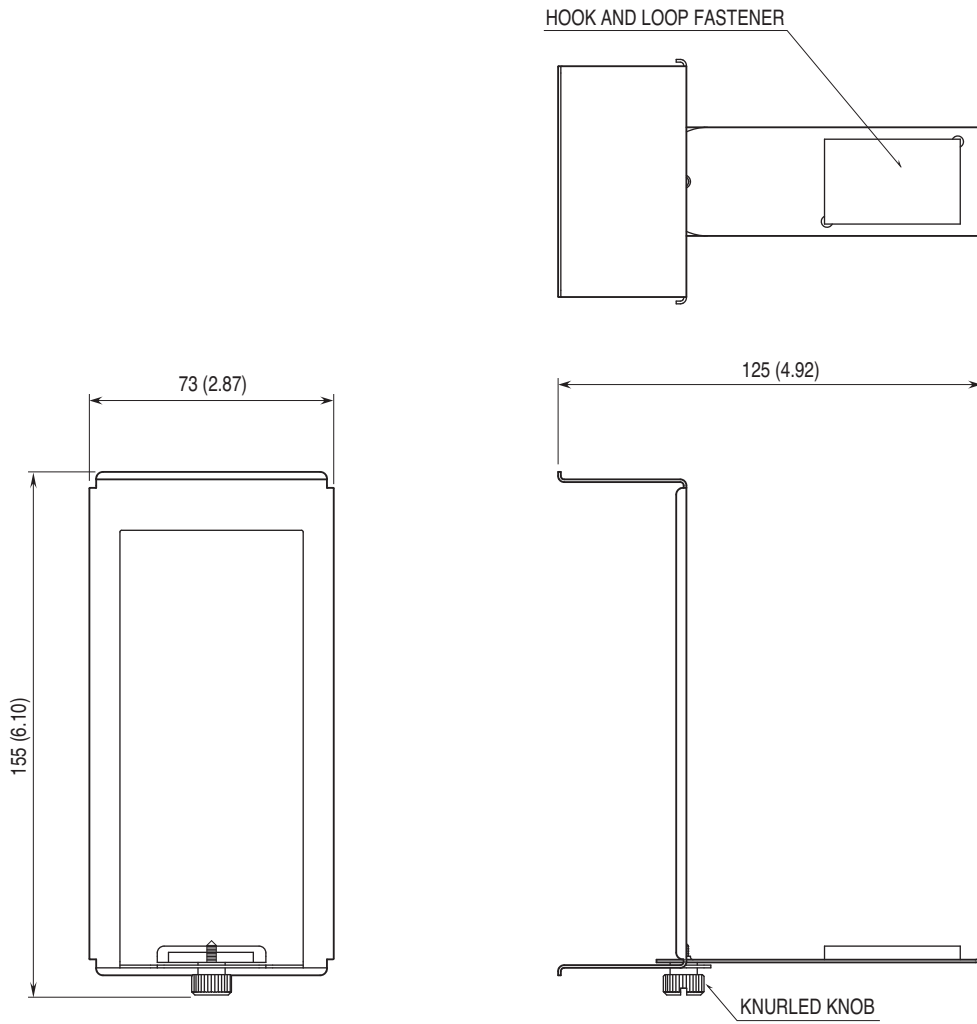

Specifications are subject to change without notice.



幸託有限公司
XIN TOP CORPORATION

TEL : (02)2598-1199
FAX : (02)2596-2331

E-mail : info@xintop.com
Website : www.xintop.com