

## Plug-in Signal Conditioners M-UNIT


### DIFFERENTIAL RTD TRANSMITTER

#### Functions & Features

- Providing a DC output in proportion to the temperature difference between two RTDs
- Isolation up to 2000 V AC
- Fast response type available
- LCD meter (engineering unit display selectable)
- Simple loop test output (0 % and 100 %)
- High-density mounting

#### Typical Applications

- Measuring temperature difference between the inlet and outlet of a heat exchanger
- Coolant
- Power plant



## MODEL: DRS-[1]-[2][3]

### ORDERING INFORMATION

- Code number: DRS-[1]-[2][3]  
Specify a code from below for each [1] through [3].  
(e.g. DRS-A-B/E/K/Q)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

### INPUT (2-wire RTDs, dual input)

JPt100 (JIS'89) or Pt100 (JIS'97, IEC)

Pt100 (JIS '89) is deviated from Pt100

(JIS '97) only within the described accuracy.

### [1] OUTPUT

#### Current

- A: 4 - 20 mA DC (Load resistance 750 Ω max.)
- B: 2 - 10 mA DC (Load resistance 1500 Ω max.)
- C: 1 - 5 mA DC (Load resistance 3000 Ω max.)
- D: 0 - 20 mA DC (Load resistance 750 Ω max.)
- E: 0 - 16 mA DC (Load resistance 900 Ω max.)

F: 0 - 10 mA DC (Load resistance 1500 Ω max.)

G: 0 - 1 mA DC (Load resistance 15 kΩ max.)

Z: Specify current (See OUTPUT SPECIFICATIONS)

#### Voltage

- 1: 0 - 10 mV DC (Load resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Load resistance 100 kΩ min.)
- 3: 0 - 1 V DC (Load resistance 100 Ω min.)
- 4: 0 - 10 V DC (Load resistance 1000 Ω min.)
- 5: 0 - 5 V DC (Load resistance 500 Ω min.)
- 6: 1 - 5 V DC (Load resistance 500 Ω min.)
- 0: Specify voltage (See OUTPUT SPECIFICATIONS)

### [2] POWER INPUT

#### AC Power

- B: 100 V AC
- C: 110 V AC
- D: 115 V AC
- F: 120 V AC
- G: 200 V AC
- H: 220 V AC
- J: 240 V AC

#### DC Power

- S: 12 V DC
- R: 24 V DC
- V: 48 V DC
- P: 110 V DC (Not selectable with Option /E2)

### [3] OPTIONS (multiple selections)

#### Input Signal Indicator

blank: Without

/E: With (0.0 - 100.0 % display)

/E2: With (in engineering unit with backlight and the simple loop test output)

#### Response Time (0 - 90 %)

blank: Standard ( $\leq 0.5$  sec.)

/K: Fast response (Approx. 25 msec.)

(Not selectable with Option /E2)

#### Other Options

blank: none

/Q: Option other than the above (specify the specification)

### SPECIFICATIONS OF OPTION: Q (multiple selections)

#### COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

#### TERMINAL SCREW MATERIAL

/S01: Stainless steel



## GENERAL SPECIFICATIONS

**Construction:** Plug-in  
**Connection:** M3.5 screw terminals  
**Screw terminal:** Chromated steel (standard) or stainless steel  
**Housing material:** Flame-resistant resin (black)  
**Isolation:** Input to output to power  
**Overrange output:** Approx. -10 to +120 % at 1 - 5 V  
**Zero adjustment:** -5 to +5 % (front)  
**Span adjustment:** 95 to 105 % (front)  
**Display scaling:** -10000 - +10000; ex-factory set to 0.00 - 100.00 (%)  
**Engineering unit:** %,  $\mu$ V, mV, V, mA, A, °C, °F,  $\Omega$ , DEG K, mHz, Hz, kHz, VAC, AAC, mg, g, kg, t, rpm or rps selectable  
**Simple loop test output:** 0 % and 100 % signal simulated by selecting the front switch positions.

## PERFORMANCE in percentage of span

**Accuracy:**  $\pm 0.2$  % (Temperature within 15 - 35°C or 59 - 95°F)  
**Display accuracy:**  $\pm (0.2$  % of FS + 1 digit) (Temperature within 15 - 35°C or 59 - 95°F)  
**Simple loop test output setting accuracy:**  $\pm 0.5$  %  
**Temp. coefficient:**  $\pm 0.015$  %/°C ( $\pm 0.008$  %/°F)  
**Line voltage effect:**  $\pm 0.1$  % over voltage range  
**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC  
**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)

## INPUT SPECIFICATIONS

**Input:** 2-wire RTDs (two)  
**Maximum leadwire resistance:** Difference 0.5  $\Omega$  maximum between the transmitter and each RTD; each leadwire resistance 10  $\Omega$  or less  
**Sensing current:** 2 mA  
**Difference range:** 0 - 20°C or 0 - 36°F (fixed)  
**Temperature range:** 0 - 50°C or 32 - 122°F (fixed)

## OUTPUT SPECIFICATIONS

■ **DC Current:** 0 - 20 mA DC  
**Minimum span:** 1 mA  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 15 V max.  
■ **DC Voltage:** -10 - +12 V DC  
**Minimum span:** 5 mV  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 10 mA max.; 5 mA for negative voltage output; at  $\geq 0.5$  V

## INSTALLATION



**Power input**  
• **AC:** Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 2 VA (approx. 3 VA with Option /E2)  
• **DC:** Operational voltage range: rating  $\pm 10$  %, or 85 - 150 V for 110 V rating (ripple 10 % p-p max.) approx. 2 W (80 mA at 24 V; approx. 3 W with Option /E2)  
**Operating temperature:** -5 to +60°C (23 to 140°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Mounting:** Surface or DIN rail  
**Weight:** 350 g (0.77 lb)




## EXTERNAL VIEW

OPTION /E

OPTION /E2

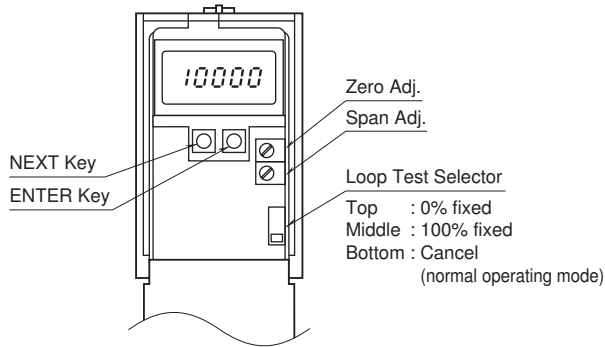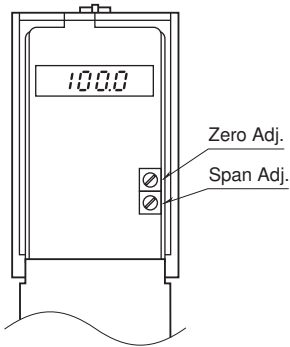


## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

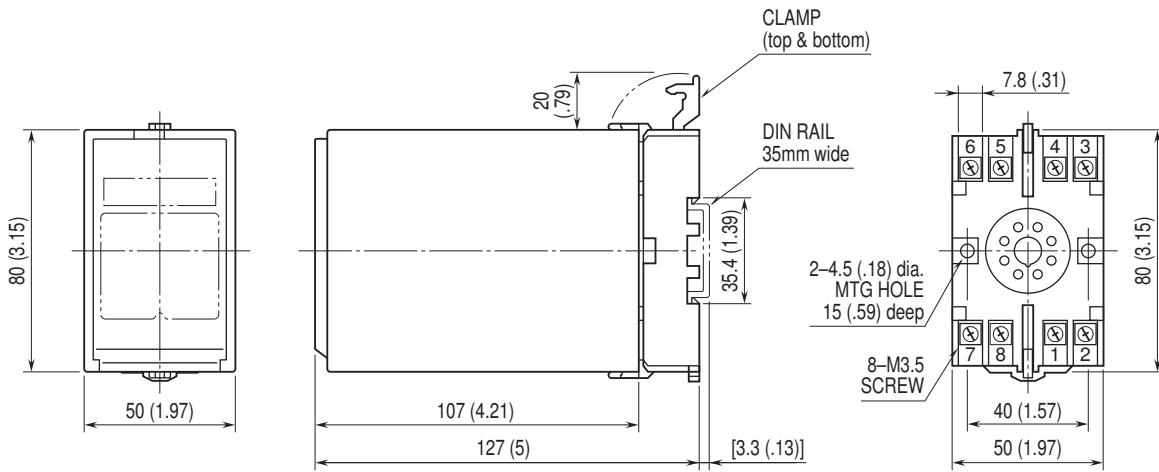

• When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

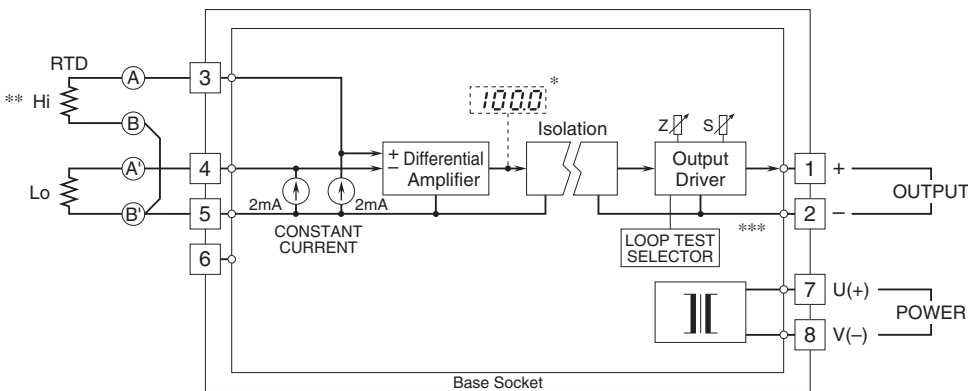

\* Option /E, E2

\*\* Be sure to connect the high temp. RTD to the terminal No. 3 for proper operation.

\*\*\*Option /E2



Specifications are subject to change without notice.