

## Space-saving Plug-in Signal Conditioners H-UNIT


### PULSE SCALER

#### Functions & Features

- Converting pulse rate into convenient engineering unit for display on a totalizing counter or meter
- High-density mounting

#### Typical Applications

- Positive displacement flowmeters and turbine flowmeters
- Magnetic tachometers



## MODEL: HPR-[1][2]-R[3]

### ORDERING INFORMATION

- Code number: HPR-[1][2]-R[3]

Specify a code from below for each [1] through [3].

- (e.g. HPR-11-R/Q)
- Input frequency range (e.g. 0 - 356.7 Hz)
- Output frequency range (e.g. 0 - 1.00 Hz)
- Specify the specification for option code /Q (e.g. /C01/S01)

### [1] INPUT

- 1: Dry contact (max. 100 kHz)
- 2: Voltage pulse (max. 100 kHz)

### [2] OUTPUT

- 1: Open collector (max. frequency 20 kHz)
- 2: 5 V pulse (max. frequency 20 kHz)
- 3: Relay contact (max. frequency 2 Hz)
- 4: 24 V pulse (max. frequency 20 Hz)

### POWER INPUT

#### DC Power

R: 24 V DC

(Operational voltage range 24 V  $\pm$ 10 %, ripple 10 %p-p max.)

### [3] OPTIONS

blank: none

/Q: With options (specify the specification)

### SPECIFICATIONS OF OPTION: Q (multiple selections)

#### COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating

/C02: Polyurethane coating


/C03: Rubber coating

#### TERMINAL SCREW MATERIAL

/S01: Stainless steel

### CAUTION

- 1) This unit's output waveform is not uniform due to its scaling method.
- 2) Use input relays which do not cause chattering (e.g. mercury relays). Other relays could be used only with a CR filter, for 10 Hz at maximum.
- 3) Use M-System's Model M2PRU instead of this unit in conjunction with the pulse output from M-System's power transducers.

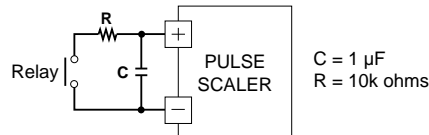

### GENERAL SPECIFICATIONS

**Construction:** Plug-in

**Connection:** M3.5 screw terminals (torque 0.8 N·m)

**Screw terminal:** Nickel-plated steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output to power

**Input pulse sensing:** Capacitor coupled; detecting pulse rise

**Sensitivity adjustment:** Single-turn screwdriver adjustment (front); 25 mVp-p - 5 Vp-p

**Scaling factor:**  $0.9999 \times 10^0 - 0.0001 \times 10^{-6}$

### INPUT SPECIFICATIONS

■ **Dry Contact:** Mechanical contact or open collector

**Max. frequency:** 100 kHz

**Pulse width time requirement:** 5  $\mu$ sec. min. (20 msec. min. for frequencies  $\leq$  10 Hz)

**Sensing:** Approx. 7.5 V DC @ 1 mA

**ON/OFF level:**  $\leq$  20 k $\Omega$  for ON,  $\geq$  100 k $\Omega$  for OFF

■ **Voltage Pulse:** Square or sine waveforms\*

**Max. frequency:** 100 kHz

**Pulse width time requirement:** 5  $\mu$ sec. min. (20 msec. min. for frequencies  $\leq$  10 Hz)

**Input amplitude:** 25 mVp-p - 50 Vp-p

**Minimum amplitude requirement**



**•With duty ratio 50 % ±10 %**

(frequency: amplitude)

0 - 2 kHz: 25 mVp-p

0 - 20 kHz: 50 mVp-p

0 - 40 kHz: 1 Vp-p

0 - 100 kHz: 5 Vp-p

**•With duty ratio other than 50 % ±10 %**

(pulse width: amplitude)

5 μsec.: 5 Vp-p

10 μsec.: 3.5 Vp-p


50 μsec.: 2 Vp-p

100 μsec.: 1 Vp-p

500 μsec.: 0.5 Vp-p

**Input impedance:** 100 kΩ minimum

\*Voltage pulse examples

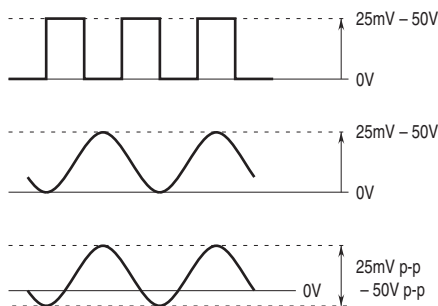**OUTPUT SPECIFICATIONS****■ Open Collector:** 50 V DC @ 50 mA (resistive load)**Frequency range:** 0 - 20 kHz**ON pulse width:** Approx. 30 μsec.**Saturation voltage:** 0.6 V DC**■ Relay Contact:** 120 V AC @ 200 mA ( $\cos \phi = 1$ )240 V AC @ 100 mA ( $\cos \phi = 1$ )

24 V DC @ 200 mA (resistive load)

**Maximum switching voltage:** 240 V AC or 30 V DC**Maximum switching power:** 24 VA or 4.8 W**Minimum load:** 5 V DC @ 10 mA**Frequency range:** 0 - 2 Hz**ON pulse width:** Approx. 30 msec.**Relay life:**  $\geq 5 \times 10^7$  cycles (mechanical) $\geq 10^5$  cycles (electrical)**■ 5 V Pulse****Frequency range:** 0 - 20 kHz**Low pulse width:** Approx. 30 μsec.**High level:** 5 V ±10 %**Low level:**  $\leq 0.5$  V**Load resistance:** 600 Ω minimum**■ 24 V Pulse****Frequency range:** 0 - 20 Hz**High pulse width:** Approx. 30 msec.**High level:** 24 V ±10 %**Low level:**  $\leq 0.5$  V**Load resistance:** 800 Ω minimum**INSTALLATION****Power consumption:** Approx. 80 mA**Operating temperature:** -5 to +55°C (23 to 131°F)**Operating humidity:** 30 to 90 %RH (non-condensing)**Mounting:** Surface or DIN rail; Standard Rack Mounting

Frame BX-16H available


**Weight:** 200 g (0.44 lbs)**PERFORMANCE****Insulation resistance:**  $\geq 100$  MΩ with 500 V DC**Dielectric strength:** 500 V AC @ 1 minute

(input to output to power)


1500 V AC @ 1 minute (input or output or power to ground)



## EXTERNAL VIEW




## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

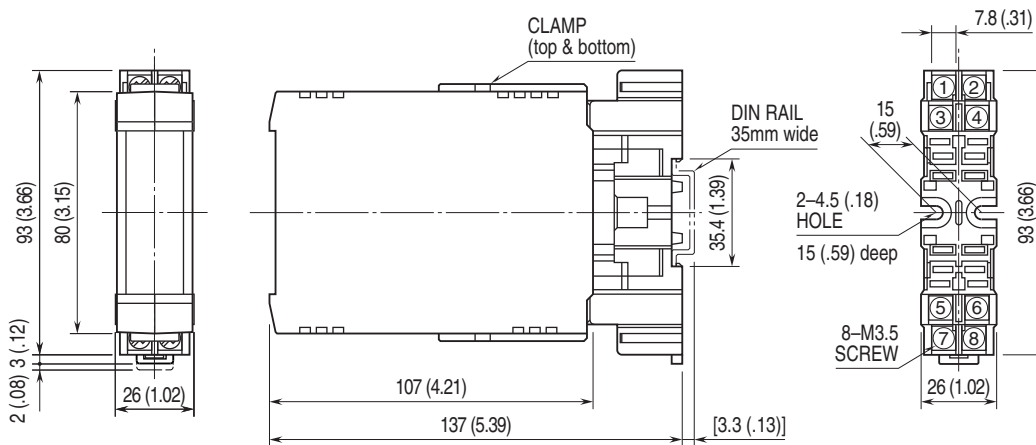


•When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

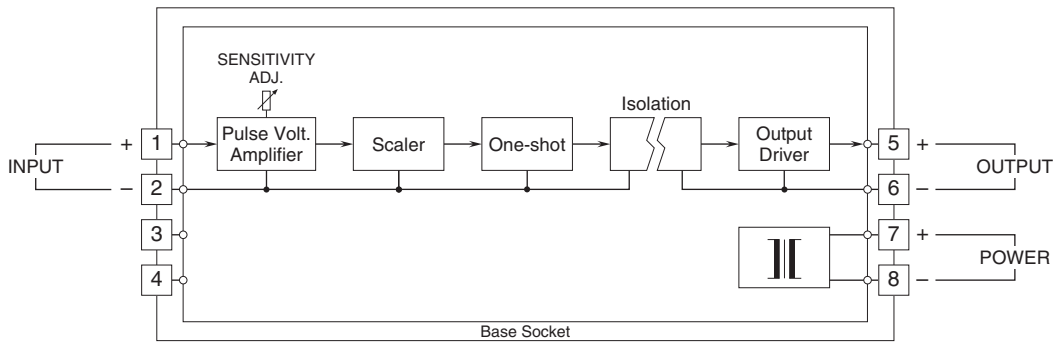


### Input Connection Examples

#### ■ Dry Contact




#### ■ Voltage Pulse




### Output Connection Examples


#### ■ Open Collector




#### ■ Voltage Pulse



#### ■ Relay •AC Powered

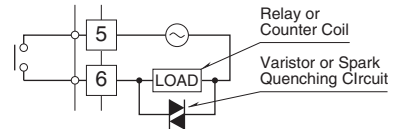

#### ■ DC Powered

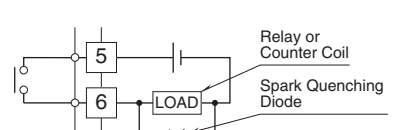



Specifications are subject to change without notice.

