

## Plug-in Signal Conditioners K-UNIT

### PULSE SCALER


(field-configurable)

#### Functions & Features

- Converting pulse rate into convenient engineering unit for display on a totalizing counter or meter
- Excitation
- Digital scaling accuracy
- Scaling factor adjustable of  $0.9999 \times 10^0$  to  $0.0001 \times 10^{-6}$
- High-density mounting

#### Typical Applications

- Positive displacement flowmeters and turbine flowmeters
- Magnetic tachometers



## MODEL: KPRU-[1][2]-[3][4]

### ORDERING INFORMATION

- Code number: KPRU-[1][2]-[3][4]
- Specify a code from below for each [1] through [4].  
(e.g. KPRU-11-B/Q)
- Input frequency range (e.g. 0 - 356.7 Hz)
  - Output frequency range (e.g. 0 - 1.00 Hz)
  - Specify the specification for option code /Q (e.g. /C01/S01)

### [1] INPUT

- 1: Dry contact (Excitation 12 V @30 mA)
  - 2: DISCONTINUED, replaced with code 8
- Voltage pulse; square wave (Excitation 12 V @30 mA)
- 7: Sine wave (Excitation 12 V @30 mA)
  - 8: Voltage pulse; square wave (Excitation 12 V @30 mA)

### [2] OUTPUT

- 1: Open collector (max. frequency 20 kHz)
- 2: 5 V pulse (max. frequency 20 kHz)
- 3: Relay contact (max. frequency 2 Hz)
- 4: 24 V pulse (max. frequency 20 Hz)

### [3] POWER INPUT

#### AC Power

- B: 100 V AC
- C: 110 V AC
- D: 115 V AC
- F: 120 V AC
- G: 200 V AC
- H: 220 V AC
- J: 240 V AC

#### DC Power

- S: 12 V DC
- R: 24 V DC

### [4] OPTIONS

#### Other Options

- blank: none
- /Q: With options (specify the specification)

### SPECIFICATIONS OF OPTION: Q (multiple selections)

#### COATING (For the detail, refer to M-System's web site.)


- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

#### TERMINAL SCREW MATERIAL

- /S01: Stainless steel

### CAUTION

- 1) The KPRU's output waveform is not uniform due to its scaling method
- 2) Use input relays which do not cause chattering (e.g. mercury relays). Other relays could be used only with a CR filter, for 10 Hz at maximum.
- 3) Use M-System's Model M2PRU instead of the KPRU in conjunction with the pulse output from M-System's power transducers.

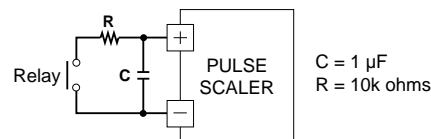

### GENERAL SPECIFICATIONS

- Construction:** Plug-in
- Connection:** M3.5 screw terminals
- Screw terminal:** Chromated steel (standard) or stainless steel
- Housing material:** Flame-resistant resin (black)
- Isolation:** Input to output to power
- Input pulse sensing:** Capacitor coupled; detecting pulse rise
- Sensitivity adjustment:** For voltage pulse input, sine wave input, adjustable between 25 mVp-p - 5 Vp-p (front)



**Scaling factor adjustment:**  $0.9999 \times 10^0 - 0.0001 \times 10^{-6}$   
(front 10-position rotary switch)

**Output pulse width adjustment:** (front)

- Open collector, 5 V pulse: 40  $\mu$ sec. - 0.8 msec.
- Relay contact, 24 V pulse: 40 msec. - 0.8 sec.

## INPUT SPECIFICATIONS

**Excitation:** 12 V DC @30 mA; shortcircuit protection

■ **Dry Contact:** Mechanical contact or open collector

**Max. frequency:** 100 kHz

**Pulse width time requirement:** 5  $\mu$ sec. min. (20 msec. min. for frequencies  $\leq$  10 Hz)

**Sensing:** Approx. 7.5 V DC @ 1 mA

**ON/OFF level:**  $\leq$  20 k $\Omega$  for ON,  $\geq$  100 k $\Omega$  for OFF

■ **Voltage Pulse:** Square or similar waveform

**Max. frequency:** 100 kHz

**Pulse width time requirement:** 5  $\mu$ sec. min. (20 msec. min. for frequencies  $\leq$  10 Hz)

**Input amplitude:** 25 mVp-p - 50 Vp-p

**Minimum amplitude requirement:**

[Pulse With (Frequency): Amplitude]

$\geq$  250  $\mu$ sec. (0 - 2 kHz): 25 mVp-p

$\geq$  25  $\mu$ sec. (0 - 20 kHz): 50 mVp-p

$\geq$  12.5  $\mu$ sec. (0 - 40 kHz): 1 Vp-p

$\geq$  5  $\mu$ sec. 0 - (100 kHz): 5 Vp-p

**Input impedance:**  $\geq$  50 k $\Omega$

■ **Sine wave:** Sine or similar waveform

**Frequency:** 10 Hz - 100 kHz

**Pulse width time requirement:** 5  $\mu$ sec. min. (20 msec. min. for frequencies  $\leq$  10 Hz)

**Input amplitude:** 25 mVp-p - 50 Vp-p

(within 10 Hz - 100 kHz)

**Minimum amplitude requirement:** (Frequency: Amplitude)

0 - 2 kHz: 25 mVp-p


0 - 20 kHz: 50 mVp-p

0 - 40 kHz: 1 Vp-p


0 - 100 kHz: 5 Vp-p

**Input impedance:**  $\geq$  50 k $\Omega$

• Square Waveform

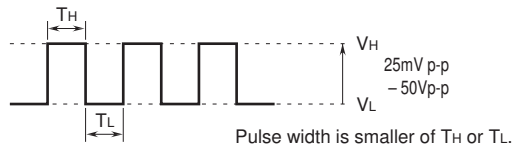

• Sine Waveform

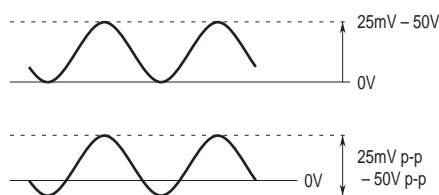

## OUTPUT SPECIFICATIONS

■ **Open Collector:** 50 V DC @ 50 mA (resistive load)

**Frequency range:** 0 - 20 kHz

**ON pulse width:** 40  $\mu$ sec. - 0.8 msec. adjustable

**Saturation voltage:** 0.6 V DC

■ **Relay Contact:** 120 V AC @ 200 mA ( $\cos \phi = 1$ )

240 V AC @ 100 mA ( $\cos \phi = 1$ )

24 V DC @ 200 mA (resistive load)

**Frequency range:** 0 - 2 Hz

**ON pulse width:** 40 msec. - 0.8 sec. adjustable

**Relay life:**

$\geq$   $5 \times 10^7$  cycles (mechanical)

$\geq$   $10^5$  cycles (electrical)

■ **5 V Pulse**

**Frequency range:** 0 - 20 kHz

**Low pulse width:** 40  $\mu$ sec. - 0.8 msec. adjustable

**Hi/Lo level:** 5 V  $\pm$  10 % for Hi;  $\leq$  0.5 V for Lo

**Load resistance:** 600  $\Omega$  min.

■ **24 V Pulse**

**Frequency range:** 0 - 20 Hz

**High pulse width:** 40 msec. - 0.8 sec. adjustable

**Hi/Lo level:** 24 V  $\pm$  10 % for Hi;  $\leq$  0.5 V for Lo

**Load current:** 30 mA max.

**Load resistance:** 800  $\Omega$  min.

## INSTALLATION

**Power input**

• **AC:** Operational voltage range: rating  $\pm$ 10 %, 50/60  $\pm$ 2 Hz, approx. 2 VA

• **DC:** Operational voltage range: rating  $\pm$ 10 %, ripple 10 %p-p max., approx. 2 W (80 mA at 24 V)

**Operating temperature:** -5 to +55 $^{\circ}$ C (23 to 131 $^{\circ}$ F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 350 g (0.77 lb)


## PERFORMANCE

**Insulation resistance:**  $\geq$  100 M $\Omega$  with 500 V DC


**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)



## EXTERNAL VIEW

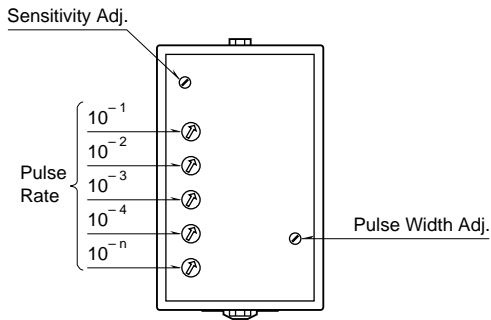


## DIMENSIONS unit: mm (inch)

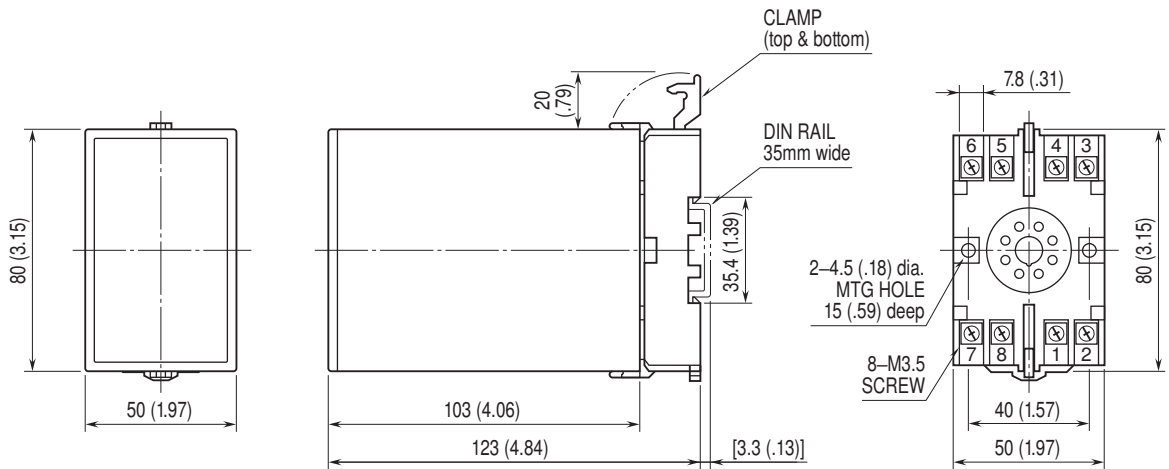


• When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

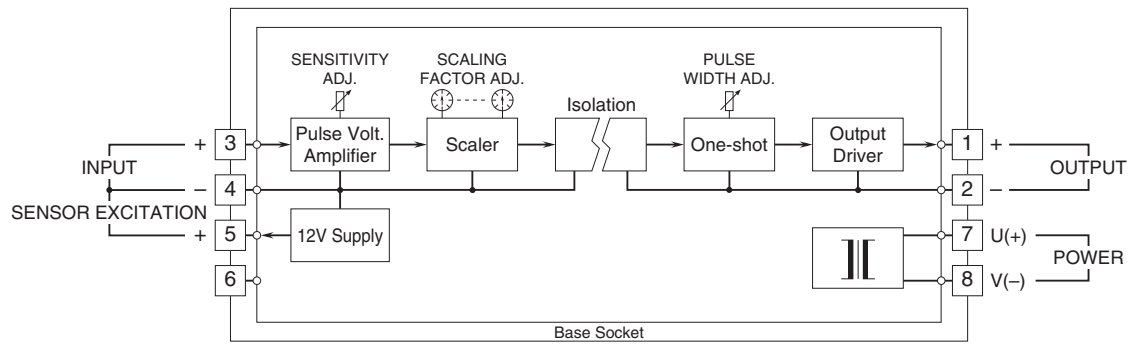


### Input Connection Examples

#### ■ Dry Contact




### Output Connection Examples

#### ■ Open Collector




#### ■ Relay Contact


##### • AC Powered




##### • DC Powered

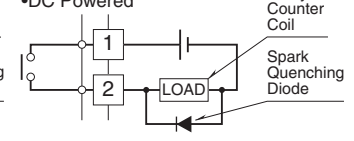

#### ■ Voltage Pulse



#### ■ Voltage Pulse, Sine Wave



Specifications are subject to change without notice.