

## Plug-in Signal Conditioners K-UNIT

### RTD TRANSMITTER


(two isolated outputs)

#### Functions & Features

- Accepting direct input from an RTD and providing two standard process signals
- Linearization
- Burnout protection
- "Active bridge" circuit containing two constant current sources allows large leadwire resistances up to 200  $\Omega$
- Fast response type available
- High-density mounting

#### Typical Applications

- Long distance transmission between the RTD and the transmitter
- Combination with intrinsic safety barriers



### MODEL: KWRS-[1][2][3]-[4][5]

#### ORDERING INFORMATION

- Code number: KWRS-[1][2][3]-[4][5]

Specify a code from below for each [1] through [5].

(e.g. KWRS-4AA-B/BL/Q)

- Temperature range (e.g. 0 - 500°C)
- Special output ranges (For codes Z & 0)
- Specify the specification for option code /Q (e.g. /C01)

When the user requires a current and a voltage output, specify the current to be the Output 1 which allows a greater load.

#### [1] INPUT RTD (2- or 3-wire)

1: JPt 100 (JIS'89)

(Usable range: -200 to +500°C, -328 to +932°F; min.span: 50°C, 90°F)

3: Pt 100 (JIS'89)

(Usable range: -200 to +650°C, -328 to +1202°F; min.span: 50°C, 90°F)

4: Pt 100 (JIS'97, IEC)

(Usable range: -200 to +650°C, -328 to +1202°F; min.span: 50°C, 90°F)

5: Pt 50  $\Omega$  (JIS'81)

(Usable range: -200 to +500°C, -328 to +932°F; min.span: 100°C, 180°F)

6: Ni 508.4  $\Omega$

(Usable range: -50 to +200°C, -58 to +392°F; min.span: 30°C, 54°F)

0: Specify

Note: Consult M-System for 2-wire RTD

#### [2] OUTPUT 1

##### Current

A: 4 - 20 mA DC (Load resistance 600  $\Omega$  max.)

B: 2 - 10 mA DC (Load resistance 1200  $\Omega$  max.)

C: 1 - 5 mA DC (Load resistance 2400  $\Omega$  max.)

D: 0 - 20 mA DC (Load resistance 600  $\Omega$  max.)

E: 0 - 16 mA DC (Load resistance 750  $\Omega$  max.)

F: 0 - 10 mA DC (Load resistance 1200  $\Omega$  max.)

G: 0 - 1 mA DC (Load resistance 12 k $\Omega$  max.)

Z: Specify current (See OUTPUT SPECIFICATIONS)

##### Voltage

1: 0 - 10 mV DC (Load resistance 10 k $\Omega$  min.)

2: 0 - 100 mV DC (Load resistance 100 k $\Omega$  min.)

3: 0 - 1 V DC (Load resistance 1000  $\Omega$  min.)

4: 0 - 10 V DC (Load resistance 10 k $\Omega$  min.)

5: 0 - 5 V DC (Load resistance 5000  $\Omega$  min.)

6: 1 - 5 V DC (Load resistance 5000  $\Omega$  min.)

0: Specify voltage (See OUTPUT SPECIFICATIONS)

#### [3] OUTPUT 2

##### Current

A: 4 - 20 mA DC (Load resistance 350  $\Omega$  max.)

B: 2 - 10 mA DC (Load resistance 700  $\Omega$  max.)

C: 1 - 5 mA DC (Load resistance 1400  $\Omega$  max.)

D: 0 - 20 mA DC (Load resistance 350  $\Omega$  max.)

E: 0 - 16 mA DC (Load resistance 430  $\Omega$  max.)

F: 0 - 10 mA DC (Load resistance 700  $\Omega$  max.)

G: 0 - 1 mA DC (Load resistance 7000  $\Omega$  max.)

Z: Specify current (See OUTPUT SPECIFICATIONS)

##### Voltage

Same range availability as Output 1

#### [4] POWER INPUT

##### AC Power

B: 100 V AC

C: 110 V AC

D: 115 V AC

F: 120 V AC

G: 200 V AC

H: 220 V AC

J: 240 V AC

##### DC Power

S: 12 V DC

R: 24 V DC



**[5] OPTIONS (multiple selections)****Response Time (0 - 90 %)**blank: Standard ( $\leq 0.5$  sec.)

/K: Fast Response (Approx. 25 msec.)

**Burnout**

blank: Upscale burnout

/BL: Downscale burnout

**Other Options**

blank: none

/Q: Option other than the above (specify the specification)

**SPECIFICATIONS OF OPTION: Q****COATING (For the detail, refer to M-System's web site.)**

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

**GENERAL SPECIFICATIONS**

Construction: Plug-in

Connection: M3.5 screw terminals

Isolation: Input to output 1 to output 2 to power

Housing material: Flame-resistant resin (black)

Overrange output: Approx. -10 to +120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Linearization: Standard

**INPUT SPECIFICATIONS**Maximum leadwire resistance: 200  $\Omega$  per wire (3-wire)

Sensing current: 2 mA

**OUTPUT SPECIFICATIONS**

■ DC Current: 0 - 20 mA DC

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 12 V max. for Output 1;

7 V max. for Output 2

■ DC Voltage: -10 - +12 V DC

Minimum span: 5 mV

Offset: Max. 1.5 times span

Load resistance: Output drive 1 mA max. at  $\geq 0.5$  V**INSTALLATION****Power input**•AC: Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 3 VA•DC: Operational voltage range: rating  $\pm 10$  % ripple 10 %p-p max., approx. 3 W (125 mA at 24 V)

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 400 g (0.88 lb)

**PERFORMANCE in percentage of span**Accuracy:  $\pm 0.2$  %Temp. coefficient:  $\pm 0.02$  %/°C ( $\pm 0.01$  %/°F)Burnout response:  $\leq 10$  sec.Line voltage effect:  $\pm 0.1$  % over voltage rangeInsulation resistance:  $\geq 100$  M $\Omega$  with 500 V DC


Dielectric strength: 2000 V AC @1 minute

(input to output to power to ground)

1000 V AC @ 1 minute (output 1 to output 2)




## DIMENSIONS unit: mm (inch)

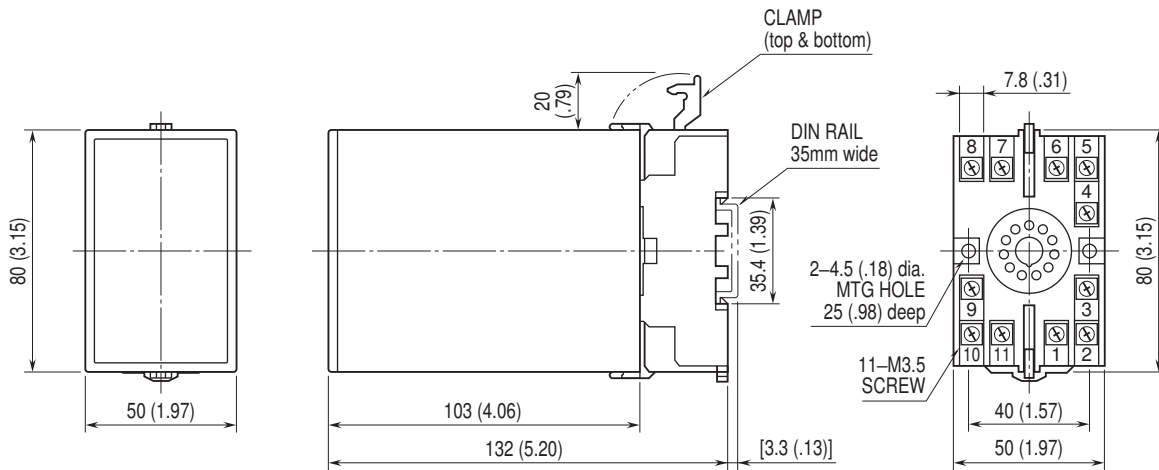

• When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

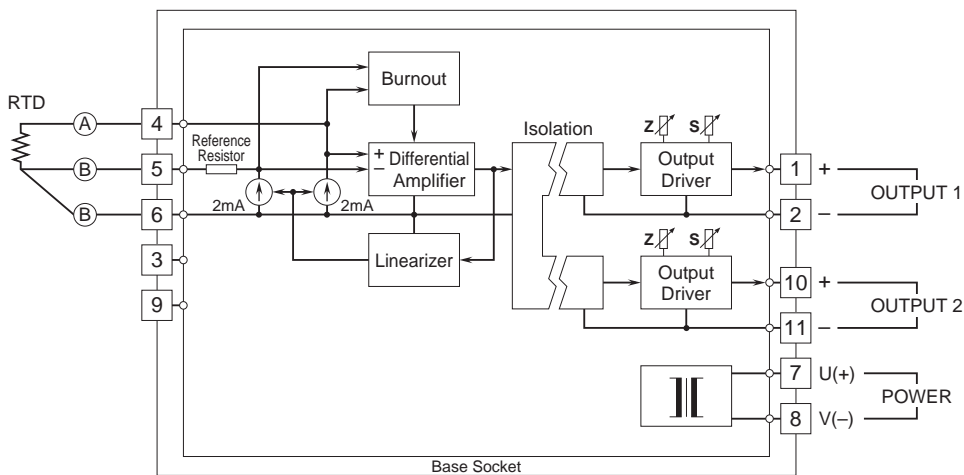

Specifications are subject to change without notice.