

Power Transducer Series LT-UNIT

FREQUENCY TRANSDUCER


(self-powered)

Functions & Features

- Provides a DC output signal in proportion to the deviation (± 5 Hz) from the center frequency (50 Hz or 60 Hz)
- DC output containing little ripple is ideal for computer input
- No auxiliary power supply required
- Isolation up to 2000 V AC
- High-density mounting
- Conforms to IEC 60688

Typical Applications

- Centralized monitoring and control of power management system in manufacturing facility or building
- Measuring frequency for UPS

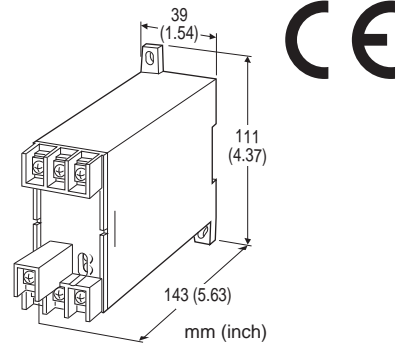

MODEL: LTHZN-[1][2][3][4]

ORDERING INFORMATION

- Code number: LTHZN-[1][2][3][4]
- Specify a code from below for each [1] through [4]. (e.g. LTHZN-11A/T)
- Special output range (For codes Z & 0)

[1] FREQUENCY

- 1: 45 - 55 Hz
- 2: 55 - 65 Hz
- 3: 45 - 65 Hz

[2] VT INPUT

- 1: 110 V AC
- 2: 220 V AC

[3] OUTPUT

Current

- A: 4 - 20 mA DC (Load resistance 500 Ω max.)
- D: 0 - 20 mA DC (Load resistance 500 Ω max.)
- F: 0 - 10 mA DC (Load resistance 1000 Ω max.)
- G: 0 - 1 mA DC (Load resistance 10 k Ω max.)
- J: 0 - 5 mA DC (Load resistance 2000 Ω max.)
- Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 1: 0 - 10 mV DC (Load resistance 10 k Ω min.)
- 2: 0 - 100 mV DC (Load resistance 100 k Ω min.)
- 3: 0 - 1 V DC (Load resistance 1000 Ω min.)
- 4: 0 - 10 V DC (Load resistance 10 k Ω min.)
- 5: 0 - 5 V DC (Load resistance 5000 Ω min.)
- 6: 1 - 5 V DC (Load resistance 5000 Ω min.)
- 0: Specify voltage (See OUTPUT SPECIFICATIONS)

[4] OPTIONS

Terminal Cover

- blank: Without
- /T: With

GENERAL SPECIFICATIONS

- Connection: M4 screw terminals (torque 1.2 N·m)
- Screw terminal: Chrome-plated steel
- Housing material: Flame-resistant resin (black)
- Isolation: Input to output
- Computation: One-shot
- Overrange output: Approx. -10 to +120 % at 1 - 5 V
- Zero adjustment: -5 to +5 % (front)
- Span adjustment: 95 to 105 % (front)

INPUT SPECIFICATIONS


- Operational range: 85 - 110 % of rating
- Overload capacity: 150 % of rating for 10 sec., 110 % continuous
- Input burden: 3 VA

OUTPUT SPECIFICATIONS

- DC Current: 0 - 20 mA DC
- Minimum span: 1 mA
- Offset: Max. 1.5 times span
- Load resistance: Output drive 10 V max.
- DC Voltage: 0 - 12 V DC
- Minimum span: 5 mV
- Offset: Max. 1.5 times span
- Load resistance: Output drive 1 mA max.; at ≥ 0.5 V



■ OPERATION DIAGRAM (example)

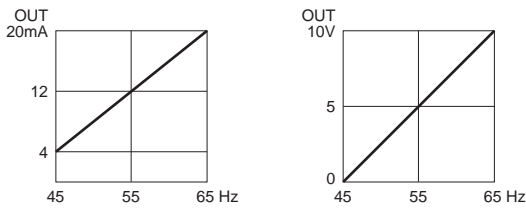

INSTALLATION

Operating temperature: -10 to +55°C (14 to 131°F)
Operating humidity: 30 to 85 %RH (non-condensing)
Mounting: Surface or DIN rail
Weight: 400 g (0.88 lb)


PERFORMANCE in percentage of span

Accuracy: $\pm 0.2\%$ (at 23°C $\pm 10^\circ\text{C}$ or 73.4°F $\pm 18^\circ\text{F}$, 45 - 65 Hz)
Magnetic field (ext. origin) effect: $\pm 0.2\%$ (400 A/m)
Response time: ≤ 1 sec. (0 - 100 % $\pm 1\%$)
Ripple: 0.5 %p-p max.
Insulation resistance: $\geq 100\text{ M}\Omega$ with 500 V DC
Dielectric strength: 2000 V AC @1 minute
 (input to output to ground)
Impulse withstand voltage: 1.2 / 50 $\mu\text{sec.}$, ± 5 kV
 (input to output or ground)


STANDARDS & APPROVALS

CE conformity:
 EMC Directive (2004/108/EC)
 EMI EN 61000-6-4: 2007
 EMS EN 61000-6-2: 2005
 Low Voltage Directive (2006/95/EC)
 EN 61010-1: 2001
 Measurement Category II
 Pollution Degree 2
 Input to output: Reinforced insulation (300 V)
IEC Standard: IEC 60688

CONNECTION DIAGRAM

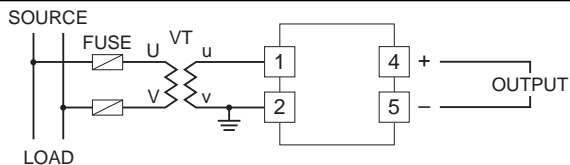

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

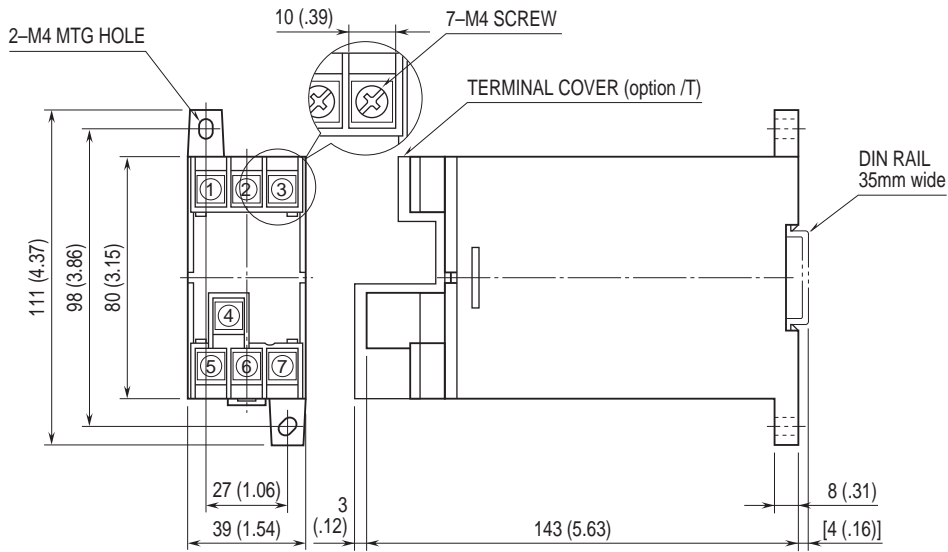

• When mounting, no extra space is needed between units.



Specifications are subject to change without notice.