

Power Transducer Series LT-UNIT

PHASE ANGLE TRANSDUCER


(self-powered)

Functions & Features

- Provides a DC output signal in proportion to phase angle
- DC output containing little ripple is ideal for computer input
- Isolation up to 2000 V AC
- High-density mounting
- Conforms to IEC 60688
- No auxiliary power supply required

Typical Applications

- Centralized monitoring and control of power management system in a manufacturing facility or building
- Measuring phase angle for a motor

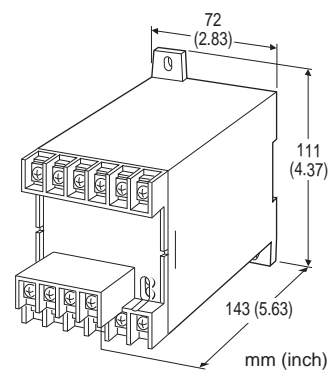

MODEL: LTPAN-[1][2][3][4][5][6]

ORDERING INFORMATION

- Code number: LTPAN-[1][2][3][4][5][6]
- Specify a code from below for each [1] through [6]. (e.g. LTPAN-115PA/T)
- Special output range (For codes Z & 0)

[1] CONFIGURATION

- 1: 3-phase / 3-wire
- 4: 3-phase / 4-wire

[2] VT INPUT (balanced load)

For 3-phase / 4-wire, phase voltages (e.g. 110 V / $\sqrt{3}$) are used.

- 1: 110 V AC
- 2: 220 V AC
- 4: 220 V / 380 V AC (3-phase/4-wire only)

[3] CT INPUT (balanced load)

- Current**
- 1: 1 A AC
 - 2: 2 A AC
 - 5: 5 A AC

[4] OUTPUT SIGNAL POLARITY

- P:** Negative in lag, positive in lead
M: Negative in lead, positive in lag

[5] OUTPUT

Current

- A:** 4 - 20 mA DC (Load resistance 500 Ω max.)
- FW:** -10 - +10 mA DC (Load resistance 1000 Ω max.)
- GW:** -1 - +1 mA DC (Load resistance 10 k Ω max.)
- JW:** -5 - +5 mA DC (Load resistance 2000 Ω max.)
- Z:** Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 6:** 1 - 5 V DC (Load resistance 5000 Ω min.)
- 1W:** -10 - +10 mV DC (Load resistance 10 k Ω min.)
- 2W:** -100 - +100 mV DC (Load resistance 100 k Ω min.)
- 3W:** -1 - +1 V DC (Load resistance 1000 Ω min.)
- 4W:** -10 - +10 V DC (Load resistance 10 k Ω min.)
- 5W:** -5 - +5 V DC (Load resistance 5000 Ω min.)
- 0:** Specify voltage (See OUTPUT SPECIFICATIONS)

[6] OPTIONS

Terminal Cover

- blank: Without
- /T: With

GENERAL SPECIFICATIONS

- Connection:** M4 screw terminals (torque 1.2 N·m)
- Screw terminal:** Chrome-plated steel
- Housing material:** Flame-resistant resin (black)
- Isolation:** Voltage input to current input to output
- Computation:** Phase angle detection
- Overrange output:** Approx. -10 to +120 % at 1 - 5 V
- Zero adjustment:** -5 to +5 % (front)
- Span adjustment:** 95 to 105 % (front)

INPUT SPECIFICATIONS

Frequency: 50 or 60 Hz

■ VOLTAGE INPUT

- Operational range:** 85 - 110 % of rating
- Overload capacity:** 150 % of rating for 10 sec., 110% continuous
- Input burden:** 2.5 VA

■ CURRENT INPUT

- Operational range:** 10 - 120 % of rating



Overload capacity: 4000 % of rating for 1 sec., 2000% for 4 sec., 120 % continuous

Input burden: 0.1 VA (input 1 A)

0.2 VA (input 2 A)

0.5 VA (input 5 A)

■ **Input range:**

lag 60°- 0 - lead 60°

lead 60°- 0 - lag 60°

OUTPUT SPECIFICATIONS

■ **DC Current:** -10 - +20 mA DC

Span: Min. 1 mA, max. 20 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 10 V max.

■ **DC Voltage:** -10 - +12 V DC


Minimum span: 5 mV

Offset: Max. 1.5 times span


Load resistance: Output drive 1 mA max. at ≥ 0.5 V

■ **OPERATION DIAGRAM (example)**

• **Negative in lag, positive in lead**

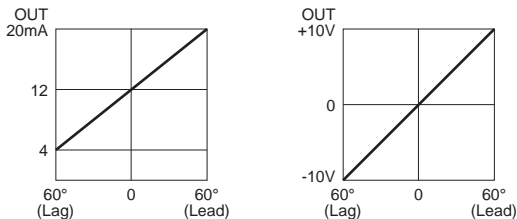

• **Negative in lead, positive in lag**

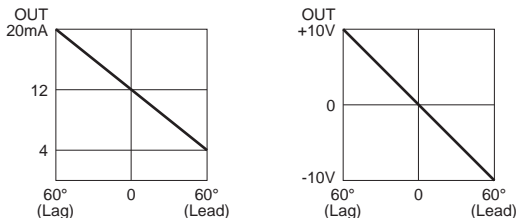

Remark: When there is 5% or less of rated input current, the output may become unstable (hunting).

INSTALLATION

Operating temperature: -10 to +55°C (14 to 131°F)

Operating humidity: 30 to 85 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 450 g (0.99 lb)

PERFORMANCE in percentage of span

Accuracy: ± 2 % with balanced load

(at 23°C ± 10 °C or 73.4°F ± 18 °F, 45 - 65 Hz)

Magnetic field (ext. origin) effect: ± 2 % (400 A/m)

Response time: ≤ 2 sec. (0 - 100 % ± 1 %)

Ripple: 0.5 %p-p max.

Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 2000 V AC @ 1 minute
(voltage input to current input to output to ground)

Impulse withstand voltage: 1.2 / 50 μ sec., ± 5 kV
(input to output or ground)

STANDARDS & APPROVALS

CE conformity:

EMC Directive (2004/108/EC)

EMI EN 61000-6-4: 2007

EMS EN 61000-6-2: 2005

Low Voltage Directive (2006/95/EC)

EN 61010-1: 2001

Measurement Category II

Pollution Degree 2


Input to output: Reinforced insulation (300 V)

IEC Standard: IEC 60688




CONNECTION DIAGRAM


■ 3-PHASE/3-WIRE

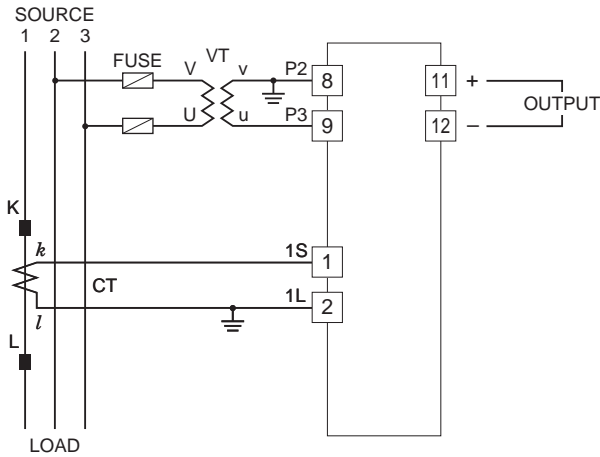

■ 3-PHASE/4-WIRE

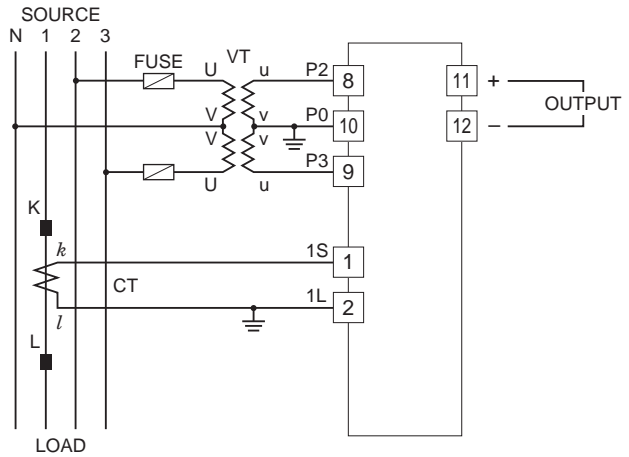

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

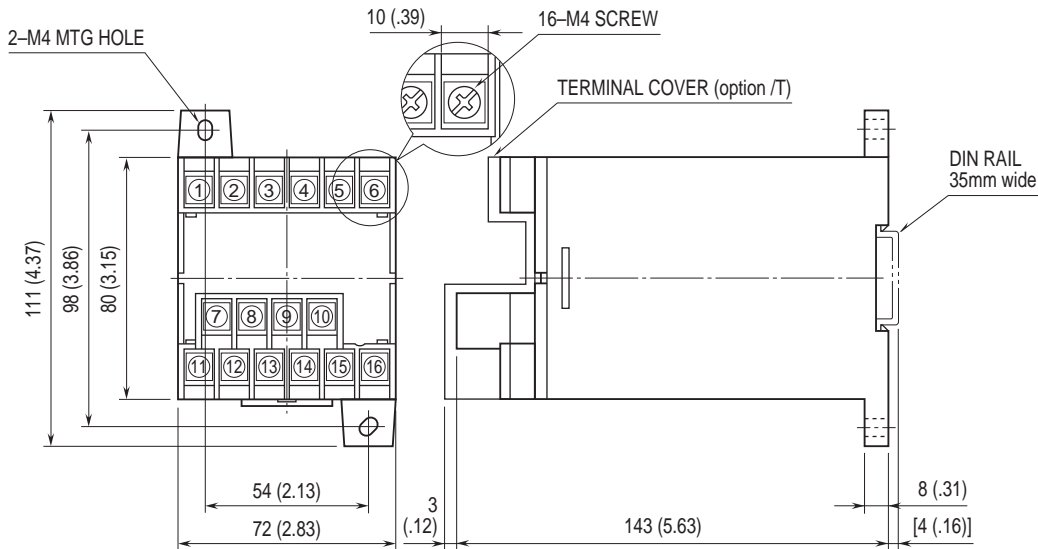

• When mounting, no extra space is needed between units.



Specifications are subject to change without notice.

