


Remote I/O R5 Series

AC CURRENT INPUT MODULE

(clamp-on current sensor type CLSA use;
screw terminal block; true RMS sensing)

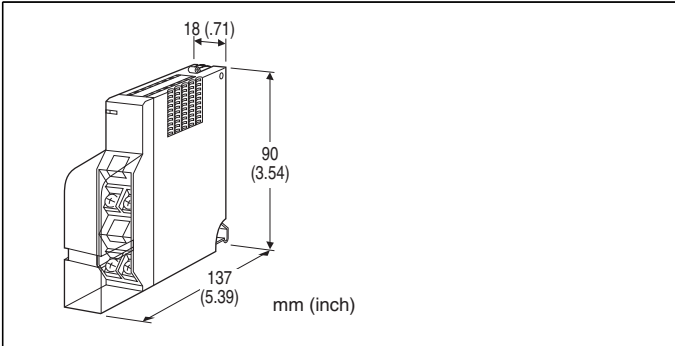

MODEL: R5T-CTA[1][2][3]

ORDERING INFORMATION

Code number: R5T-CTA[1][2][3]

Specify a code from below for each [1] through [3].
(e.g. R5T-CTA2W/Q)

- Specify the specification for option code /Q
(e.g. /C01/S01)

[1] NO. OF CHANNELS

- 1: 1 channel
- 2: 2 channels

[2] COMMUNICATION MODE

- S: Single
- W: Dual

[3] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to M-System's web site.)

- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

TERMINAL SCREW MATERIAL

- /S01: Stainless steel

RELATED PRODUCTS

- Clamp-on current sensor (model: CLSA-08)
- Clamp-on current sensor (model: CLSA-12)

- Clamp-on current sensor (model: CLSA-30)
- Clamp-on current sensor (model: CLSA-50)
- Special cable (model: CLSA-08C)

The clamp-on current sensor, not included in the product package, must be ordered separately.

Refer to the data sheet for the sensor for more information such as applicable wire diameter.

GENERAL SPECIFICATIONS

Connection

Internal bus: Via the Installation Base
(model: R5-BSx)

Input: M3.5 screw terminal block
(torque 0.8 N·m)

Power supply: Via the base (model: R5-BSx)

Screw terminal: Nickel-plated steel (standard) or stainless steel

Isolation: Input 1 to input 2 to internal power

Input waveform

RMS sensing: Up to 15 % of 3rd harmonic content

Input range: Selectable with the side DIP SW

RUN indicator: Bi-color (red/green) LED;

Red when the bus A operates normally;

Green when the bus B operates normally;

Amber when both buses operate normally.

Low-end cutout: Converted as 0 % for the input below 2 %

INPUT SPECIFICATIONS

Input

CLSA-08: 0 - 80 A AC

CLSA-12: 0 - 120 A AC

CLSA-30: 0 - 300 A AC

CLSA-50: 0 - 500 A AC

Frequency: 50 or 60 Hz

Operational range: 5 - 115 % of rating

INSTALLATION

Operating temperature: -10 to +55°C (14 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Atmosphere: No corrosive gas or heavy dust

Mounting: Installation Base (model: R5-BSx)

Weight: 110 g (0.24 lb)

PERFORMANCE

Conversion accuracy: ± 0.5 % (at 5 - 100 % input) except the sensor accuracy

Data range: Engineering unit value $\times 100$ (binary without sign)

Data allocation: 1 (2 for 2-channel type)

Temp. coefficient: ± 0.015 %/°C (± 0.008 %/°F)



MODEL: R5T-CTA

Response time: ≤ 0.5 sec. (0 - 90 %)


Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 1500 V AC @ 1 minute (input 1 to input 2 to internal power)


2000 V AC @ 1 minute (power input to FG; isolated on the power supply module)

EXTERNAL VIEW


■ SIDE VIEW

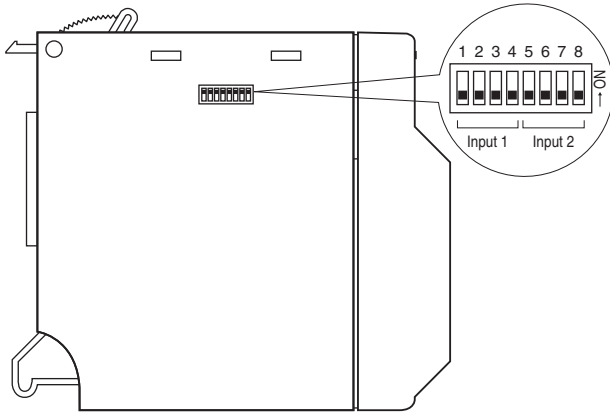

■ FRONT VIEW

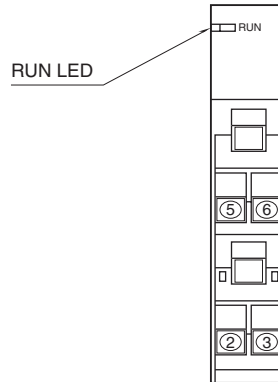

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

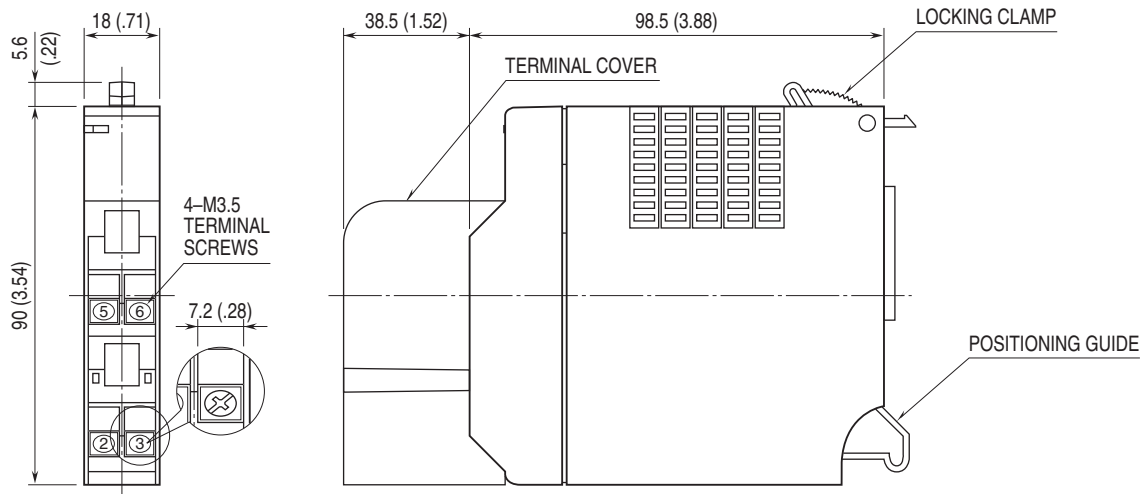

幸託有限公司
XIN TOP CORPORATION


TEL : (02)2598-1199

FAX : (02)2596-2331

E-mail : info@xintop.com

Website : www.xintop.com

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

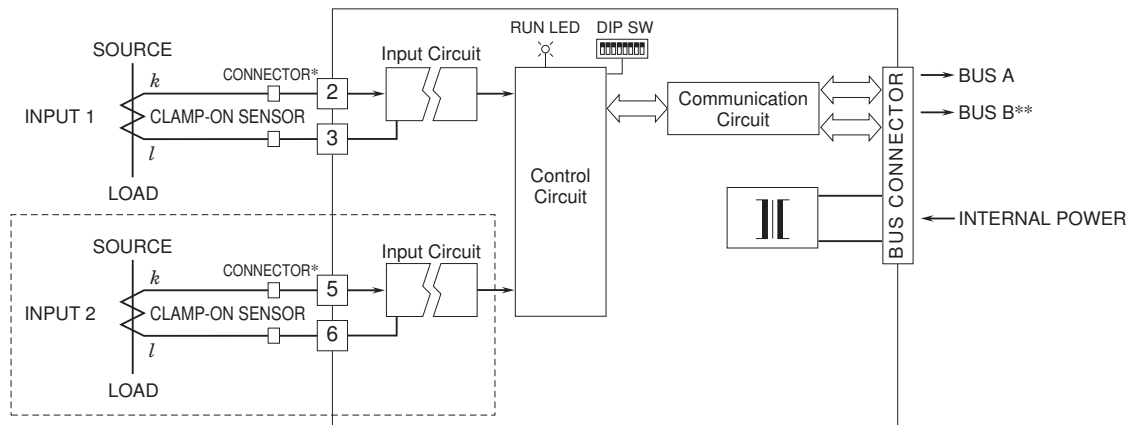

* Connector provided only for the CLSA-08 and CLSA-12.

**For dual redundant communication.

NOTE: The section enclosed by broken line is with 2-ch. option.



Specifications are subject to change without notice.