

## Plug-in Signal Conditioners M-UNIT

V: 48 V DC


### I/P TRANSDUCER

#### Functions & Features

- Converting a DC input into a proportional standard pneumatic signal
- Semiconductor pressure sensor in the feedback circuit
- High resolution
- No mounting position effect
- High-density mounting

#### Typical Applications

- Converting a 4 - 20 mA from a PID controller into a pneumatic signal



### MODEL: VP-[1]-[2][3]

#### ORDERING INFORMATION

- Code number: VP-[1]-[2][3]  
Specify a code from below for each [1] through [3].  
(e.g. VP-6-B/A2S/P7)

#### [1] INPUT

##### Current

A: 4 - 20 mA DC (Input resistance 250 Ω)

##### Voltage

6: 1 - 5 V DC (Input resistance 1 MΩ min.)

#### [2] POWER INPUT

##### AC Power

B: 100 V AC

C: 110 V AC

D: 115 V AC

F: 120 V AC

G: 200 V AC

H: 220 V AC

J: 240 V AC

##### DC Power

S: 12 V DC

R: 24 V DC

### [3] OPTIONS (multiple selections)

#### Output

blank: 0.2 - 1.0 kgf/cm<sup>2</sup>

/A1S: 19.6 - 98.1 kPa

/A2S: 20 - 100 kPa

/A3S: 20.7 - 103.4 kPa

/A2: 0.2 - 1.0 bar

/A3: 3 - 15 psig

#### Pneumatic Connection

blank: Rc 1/4

/P7: 1/4" NPT fitting

#### GENERAL SPECIFICATIONS

Construction: Plug-in

#### Connection

Input &amp; power input: M3.5 screw terminals (torque 0.8 N·m)

Pneumatic: Rc 1/4" or 1/4" NPT female; (torque 12 N·m)

#### Material

•Housing: Flame-resistant resin (black)

•Base socket: Die cast aluminium

•Valve section: Die cast aluminium

•Screw terminals: Nickel-plated steel;

Isolation: Input to power

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

#### INPUT SPECIFICATIONS

• DC Current:

Shunt resistor attached to the input terminals (0.5 W)

#### OUTPUT SPECIFICATIONS

##### Output:

19.6 - 98.1 kPa, 0.2 - 1.0 kgf/cm<sup>2</sup>

20 - 100 kPa, 0.2 - 1.0 bar

20.7 - 103.4 kPa, 3 - 15 psig

The output goes below 0 % if the input loop is open.

Maximum air delivery: 60 NI/minute (2.1 SCFM)

Maximum air exhaust: 60 NI/minute (2.1 SCFM)

#### INSTALLATION

Supply pressure: 140 kPa (1.4 kgf/cm<sup>2</sup>, 1.4 bar, 20 psig) ±10 %

Use dry air containing no carbon black or other foreign particles. To ensure reliability use an air filter (0.01 microns).

Air consumption: 6 NI/minute (0.21 SCFM)

#### Power input

•AC: Operational voltage range: rating ±10 %,



50/60 ±2 Hz, approx. 2 VA

•DC: Operational voltage range: rating ±10 %  
(ripple 10 % p-p max.) approx. 1 W (30 mA at 24 V)

**Operating temperature:** -5 to +60°C (23 to 140°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface

**Weight:** 750 g (1.65 lbs)

## PERFORMANCE in percentage of span

**Accuracy:** ±0.3 % including linearity and repeatability

**Linearity:** ±0.2 %

**Repeatability:** 0.1 %

**Temp. coefficient:** ±0.05 %/°C (±0.03 %/°F)

**Response time:** ≤ 3 sec. (0 - 90 %)


**Mounting position effect:** ±0.1 % (all dimensions)

**Line voltage effect:** ±0.1 % over voltage range

**Insulation resistance:** ≥ 100 MΩ with 500 V DC

**Dielectric strength:** 2000 V AC @ 1 minute (input to power to housing)


## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

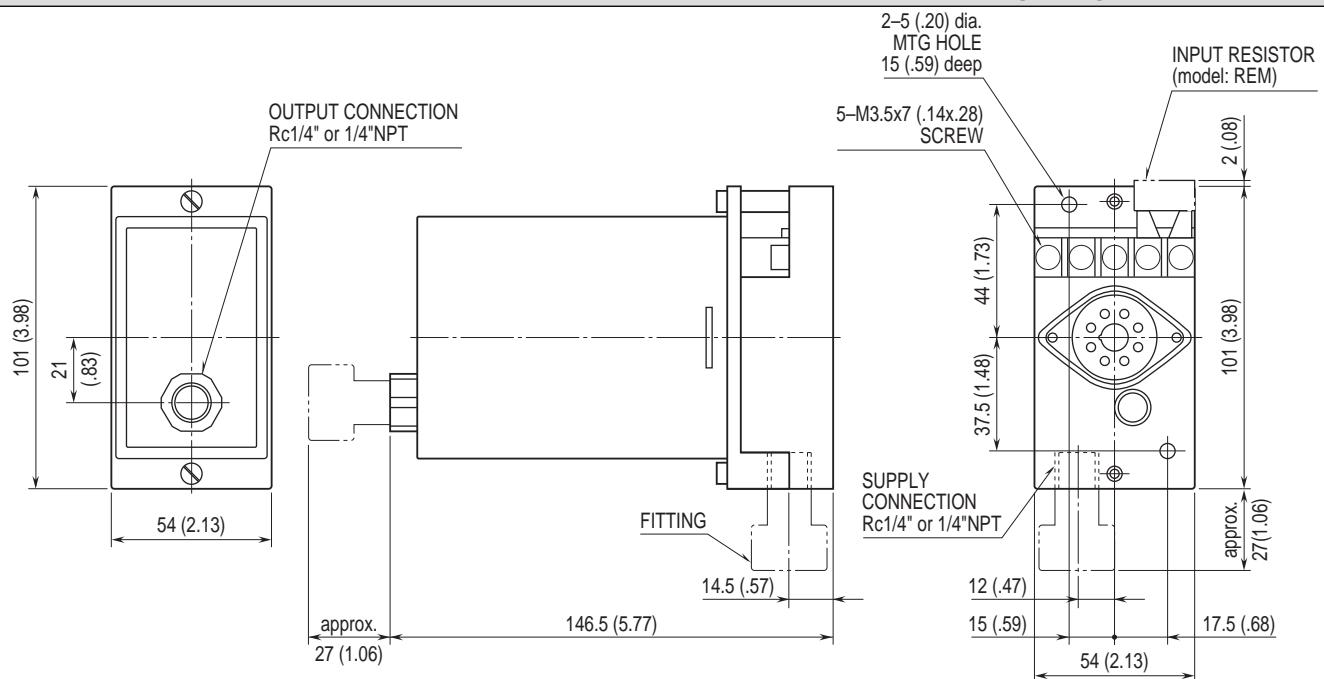

- When mounting, no extra space is needed between units.
- Fittings are provided for 1/4"NPT connection.



**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

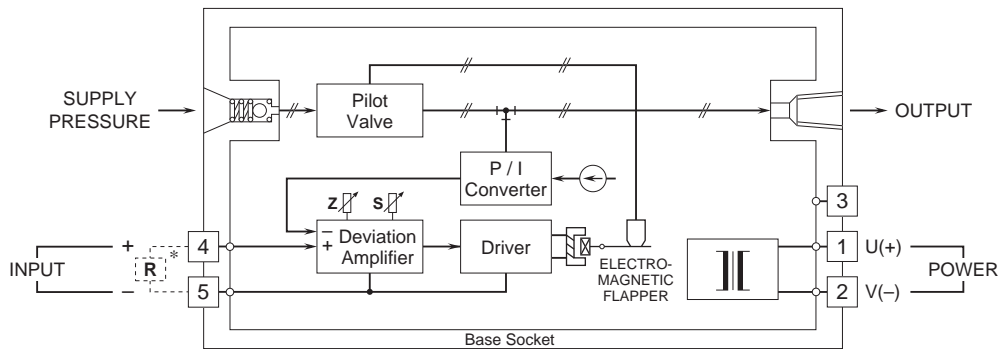

\*Input shunt resistor attached for current input.



Specifications are subject to change without notice.